
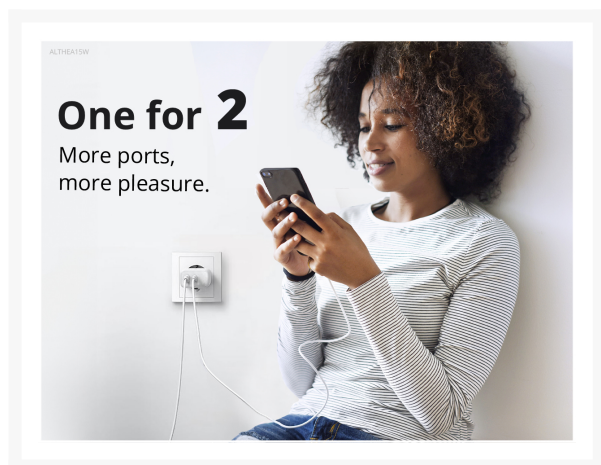




ALTHEA15W 20W 2-Port GaN USB PD Charger, USB-C x 1, USB-A x 1, QC 3.0, PPS, PD 3.0

Product Images

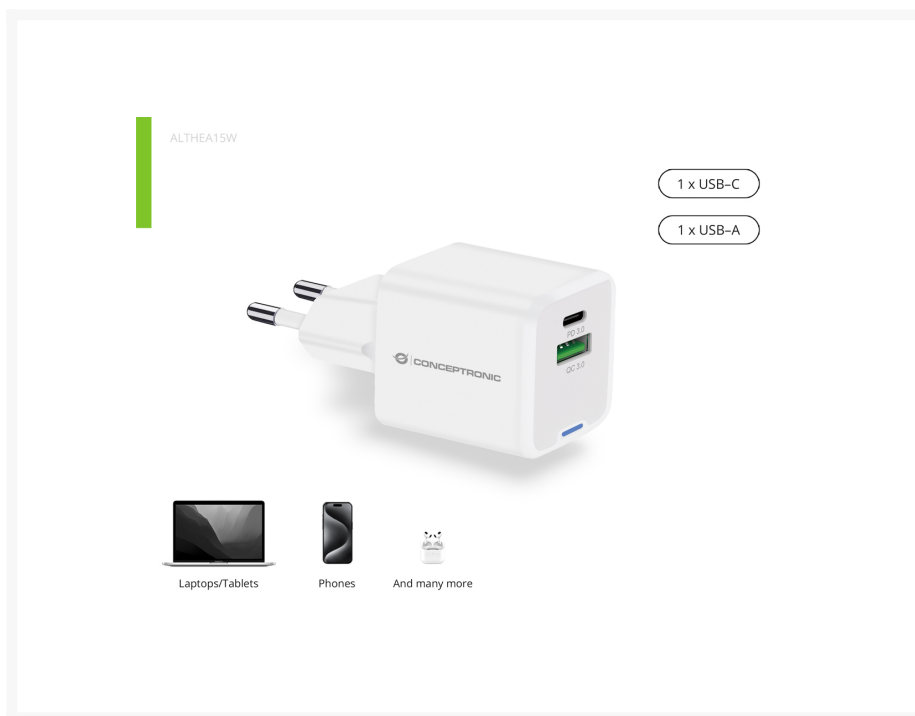


ALTHEA15W

Premium GaN-Technologie

Your benefits:

- > GaN chargers are smaller
- > less heat during power transfer
- > more energy efficient



ALTHEA15W

Universal compability

Laptop



MacBook Pro



MacBook Air



Dell XPS 13

Tablet



iPad Pro / Air / Mini



Galaxy Tab 58 / 57 / A8

Smartphone



iPhone



HUAWAI Mate 60 Series



Galaxy



Google Pixel

And many more



AirPods / DJI / Canon / Gaming



Short Description






- **High-Power GaN Technology:** This charger utilizes advanced Gallium Nitride (GaN) technology, providing up to 20W of total power for faster and more efficient charging.
- **Versatile Port Selection:** Equipped with 2 ports including 1 USB-C ports (with PD 3.0) and 1 USB-A ports (with QC 3.0), allowing simultaneous charging for multiple devices with varying power requirements.
- **Wide Compatibility:** Supports a range of output options from 3.3V to 12.0V across its ports, ensuring compatibility with devices from smartphones to laptops.
- **Enhanced Safety Features:** Built-in protections against overload, short circuiting, and overheating, ensuring the safety of both the charger and connected devices.

- **Efficiency and Fast Charging Technology:** Incorporates USB Power Delivery (PD) 3.0 and Quick Charge (QC) 3.0 technologies for rapid charging, along with Programmable Power Supply (PPS) compliance to maximize charging efficiency and minimize heat generation.

Description



33W maximum charge **One for 2** **Premium GaN-Technologie** **Faster charging**

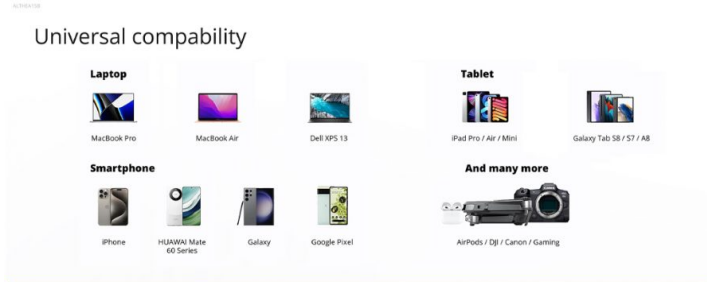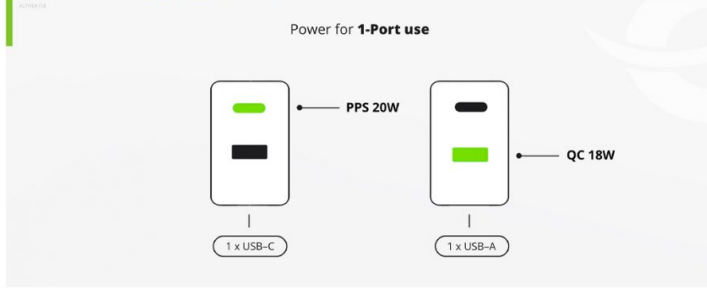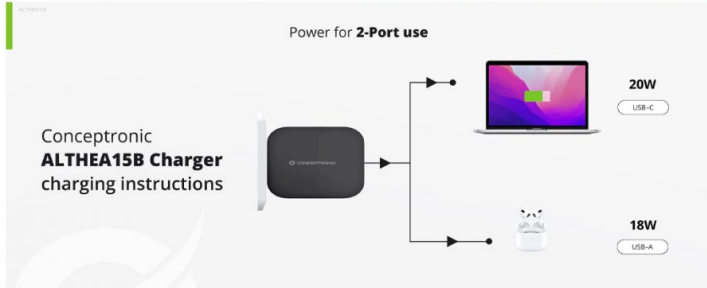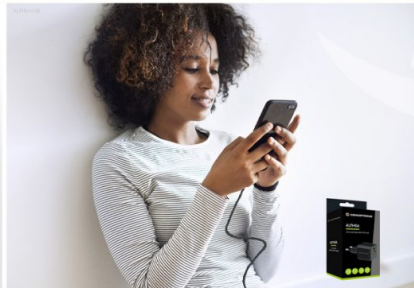

This charger leverages advanced Gallium Nitride (GaN) technology to deliver up to 20W of total power, ensuring faster and more efficient charging. It features a versatile port selection with 1 USB-C port supporting USB Power Delivery (PD) 3.0 and 1 USB-A port with Quick Charge (QC) 3.0, allowing simultaneous charging of multiple devices with varying power needs. The charger supports a wide range of output options from 3.3V to 12.0V, making it compatible with everything from smartphones to laptops. Enhanced safety is provided through built-in protections against overload, short circuiting, and overheating. Additionally, it incorporates USB Power Delivery (PD) 3.0 and Quick Charge (QC) 3.0 technologies, along with Programmable Power Supply (PPS) compliance, to ensure rapid charging while optimizing efficiency and minimizing heat generation.

Additional Information

Number of outputs	2
USB Type-A ports quantity	1
Fast charging technology	Quick Charge 3.0, Power Delivery 3.0, Programmable Power Supply (PPS)
USB Type-C ports quantity	1
Programmable power supply (PPS) (YES/NO)	Yes
Housing Material	Polycarbonate (PC)
Number of simultaneously connected devices (max)	2
Port 1 Power Output	USB-C output: DC 5.0V/3.0A, 9.0V/2.22A, 12.0V/1.67A (PD); 3.3-5.9V/3A, 3.3-11V/1.8A (PPS)
Port 2 Power Output	USB-A output: DC 5.0V/3.0A, 9.0V/2.0A, 12.0V/1.5A (QC 3.0)
Power Plug Type	EU
Number of cartons per pallet	16 piece
Package volume	340.474 cubic_centimeter
Pallet net length	800 millimeter
Pallet net width	1200 millimeter
Pallet net height	1800 millimeter
Quantity per pack	1 piece
Package Depth	172 millimeter
Package Height	37 millimeter
Package Width	53.5 millimeter
Package Weight	15 gram
Harmonized System (HS) code	850440
Customs product code (TARIC)	8504408390
Quantity per pallet	1600 piece

Sustainability compliance	No
Approval and Compliance	CE, ERP, RoHS, REACH
Operating humidity	5% RH ~ 95% RH
Operating temperature	0°C ~ 40°C
Package Content	Quick installation guide
Storage temperature	-20°C ~ 80°C
Package Contents	ALTHEA15W Multilingual quick installation guide
USB Power Delivery revision	3.0
Operating temperature (T-T) Max	40 celsius
Operating temperature (T-T) Min	0 celsius
Storage relative humidity (H-H) Max	90%
Storage relative humidity (H-H) Min	5%
Operating relative humidity (H-H) Max	95%
Operating relative humidity (H-H) Min	5%
Storage temperature (T-T) Max	80 celsius
Storage temperature (T-T) Min	-20 celsius
Maximum AC Input	240 volt
Minimum AC Input	100 volt
Input current	0.5 ampere
Maximum power	20 watt
Iccat_Power protection features	Over current, Over power, Short circuit
Product Height	30 millimeter
Product Width	33.5 millimeter
Product Depth	38.5 millimeter
Product Weight	50.2 gram
Dimensions (W x D x H)	33.5 x 38.5 x 30 mm
Product weight (kg)	0.0502

Color	White
EAN	4015867236468
Model Number	ALTHEA15W
Power input	AC 100.0-240.0V, 0.5A max, 50-60Hz

