



Copyright © 2014 Dell Inc. All rights reserved. This product is protected by U.S. and international copyright and intellectual property laws. Dell and the Dell logo are trademarks of Dell Inc. in the United States and/or other jurisdictions. All other marks and names mentioned herein may be trademarks of their respective companies

2014 - 03 Rev. A00 Regulatory model: P20T | Type: P20T001 Computer model: Inspiron 11-3147





Right



Base



Display

1 Power/Battery status light


Indicates the power state and battery state of the computer.

Solid white light — Power adapter is connected to the computer and the battery is being charged.

Solid yellow light – Battery charge is low or critical.

Off— Power adapter is connected to the computer and battery is fully charged or power adapter is not connected to the computer.



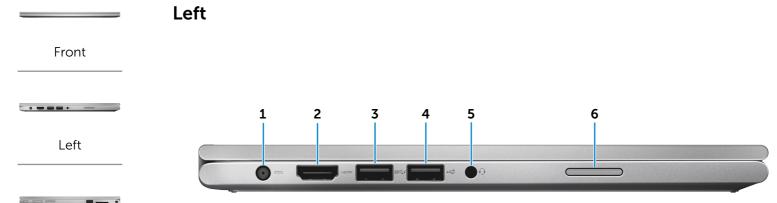

Right



Base



Display

1 Power-adapter port

Connect a power adapter to provide power to your computer and charge the battery.

2 HDMI port

Connect a TV or another HDMI-in enabled device. Provides video and audio output.

3 USB 3.0 port with PowerShare

Connect peripherals such as storage devices, printers, and so on. Provides data transfer speeds up to 5 Gbps.

PowerShare allows you to charge your USB devices even when your computer is turned off.

4 USB 2.0 port

Connect peripherals such as storage devices, printers, and so on. Provides data transfer speeds up to 480 Mbps.

5 Headset port

Connect a headphone, a microphone, or a headphone and microphone combo (headset).

6 Left speaker

Provides audio output from your computer.



Front


Left

Right

Base



Display

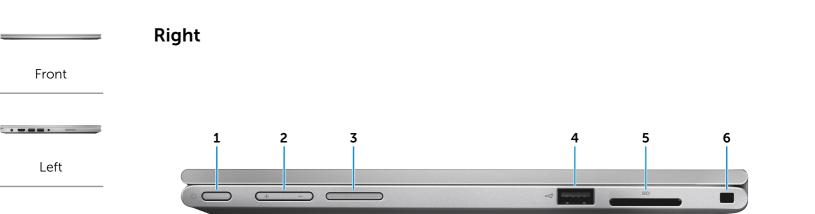

1 Power button

Press to turn on the computer if it is turned off or in Sleep state.

Press to put the computer in Sleep state if it is turned on. Press and hold for 4 seconds to force shut-down the computer.

NOTE: You can customize the power-button behavior in Power Options. For more information, see Me and My Dell at dell.com/support.

2 Volume-control buttons (2)

Press to increase or decrease the volume

3 **Right speaker**

Provides audio output from your computer.

USB 2.0 port 4

Connect peripherals such as storage devices, printers, and so on. Provides data transfer speeds up to 480 Mbps.

5 Media-card reader

Reads from and writes to media cards.

6 Security-cable slot

Connect a security cable to prevent unauthorized movement of your computer.



Front


Left

Right

.....

Views

Base

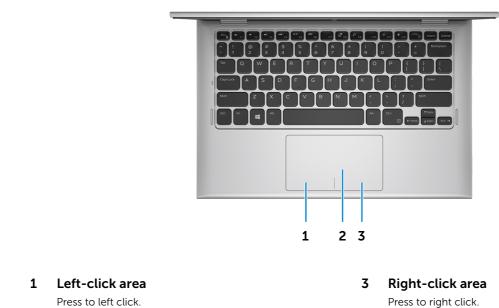



Base

2 Touchpad

Move your finger on the touchpad to move the mouse pointer. Tap to left click.

Display



Front

Left

Right




Base



Display



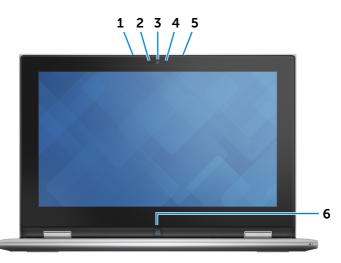

Left microphone

Provides high-quality digital sound input for audio recording, voice calls, and so on.

2 Ambient-light sensor

Detects the ambient light and automatically adjusts the display brightness.

3 Camera

1

Allows you to video chat, capture photos, and record videos.

4 Camera-status light

Turns on when the camera is in use.

5 Right microphone

Provides high-quality digital sound input for audio recording, voice calls, and so on.

6 Windows button

Press to go to the Start screen.

Modes

Notebook



Tablet



Tablet Stand



Tent





Dimensions and Weight

Height	19 mm (0.74 in)
Width	300 mm (11.81 in)
Depth	201 mm (7.91 in)
Weight (maximum)	1.41 kg (3.10 lb)
	NOTE : The weight of your computer varies depending on the configuration ordered and the manufacturing variability.



System Information

Computer model	Inspiron 11-3147
Processor	Intel Pentium Quad Core
	Intel Celeron Dual Core
Chipset	Integrated in the processor





Memory

Slot	One SODIMM slot
Туре	DDR3L
Speed	1333 MHz
Configurations supported	4 GB





Ports and Connectors

External:	
USB	Two USB 2.0 ports
	One USB 3.0 port
Audio/Video	One HDMI port
	 One headphone and microphone combo (headset) port
Internal:	
M.2 card	One M.2 card slot for Wi-Fi and Bluetooth combo card



Communications

Wireless

- Wi-Fi 802.11 b/g/n
- Wi-Fi 802.11 ac
- Bluetooth 4.0





Video

Controller

Memory

Intel HD Graphics Shared system memory





Audio

Controller	Realtek ALC3234 with Waves MaxxAudio
Speakers	Two
Speaker output:	
Average	2 watt
Peak	2.5 watt
Microphone	Digital-array microphones in camera assembly
Volume controls	Media-control shortcut keys and volume-control buttons.





Storage

Interface Hard drive SATA 3 Gbps One 2.5-inch drive



Media-Card Reader

Туре

Cards supported

One 2-in-1 slot

- SD Card
- MultiMedia Card (MMC)





Display

Туре	11.6-inch HD WLED touch
Resolution (maximum)	1366 x 768
Dimensions:	
Height	143.81 mm (5.66 in)
Width	256.12 mm (10.08 in)
Diagonal	294.64 mm (11.60 in)
Refresh rate	60 Hz
Operating angle	0 degrees (closed) to 360 degrees
Viewing angle	160 degrees
Pixel pitch	0.1875 mm
Controls	Brightness can be controlled using shortcut keys.





Keyboard

Туре	Chiclet keyboard
Shortcut keys	Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key.
	NOTE : You can define the primary behavior of the shortcut keys by changing Function Key Behavior in System Setup.





Camera

Resolution:	
Still image	0.92 megapixel
Video	1280 x 720 (HD) at 30 fps (maximum)
Diagonal viewing angle	74 degrees





Touchpad

Resolution:		
Horizontal	1207 dpi	
Vertical	1702 dpi	
Dimensions:		
Width	102.40 mm (4.03 in)	
Height	77.40 mm (3.04 in)	





Battery

Туре	3 cell
Dimensions:	
Width	77.20 mm (3.04 in)
Depth	254 mm (10 in)
Height	6.80 mm (0.27 in)
Weight (maximum)	0.25 kg (0.55 lb)
Voltage	11.4 VDC
Charging time when the computer is off (approximate)	Within 4 hours
Operating time	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
Life span (approximate)	300 discharge/charge cycles
Temperature range:	
Operating	0°C to 35°C (32°F to 95°F)
Storage	-40°C to 65°C (-40°F to 149°F)
Coin-cell battery	CR-2032





Power Adapter

Туре	65 W
Input voltage	100 VAC-240 VAC
Input frequency	50 Hz-60 Hz
Input current	1.60 A
Output current	3.34 A
Rated output voltage	19.50 VDC
Temperature range:	
Operating	0°C to 40°C (32°F to 104°F)
Storage	-40°C to 70°C (-40°F to 158°F)



Computer Environment

Airborne contaminant level	G1 as defined by ISA-S71.04-1985	
	Operating	Storage
Temperature range	0°C to 40°C (32°F to 104°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	110 G [†]	160 G [‡]
Altitude (maximum)	-15.2 m to 3048 m (-50 ft to 10,000 ft)	-15.2 m to 10,668 m (-50 ft to 35,000 ft)

* Measured using a random vibration spectrum that simulates user environment.

† Measured using a 2 ms half-sine pulse when the hard drive is in use.

‡ Measured using a 2 ms half-sine pulse when the hard-drive head is in parked position.

