




New level of visual comfort

Dell UltraSharp 27 Thunderbolt™ Hub Monitor | **U2724DE**

The world's # 1 monitor company*

* Dell monitors are #1 Worldwide for 9 years! Source: IDC Worldwide Quarterly PC Monitor Tracker, Q2 2023. From 2014 to 2023.

Ports & Slots

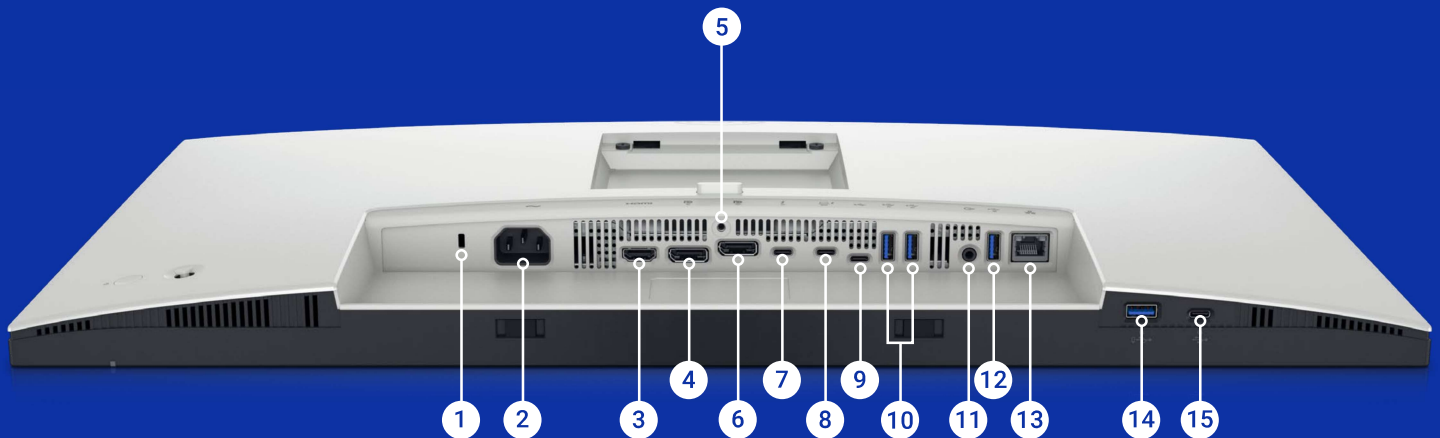

- | | | | |
|----------|---|-----------|---|
| 1 | Security lock slot ¹ | 9 | USB Type-C upstream port (SuperSpeed USB 10Gbps, USB 3.2 Gen 2) |
| 2 | Power connector | 10 | 2 x USB Type-A downstream port (SuperSpeed USB 10Gbps, USB 3.2 Gen 2) |
| 3 | HDMI (HDCP 1.4)(Supports up to QHD 2560 x 1440 120Hz TMDS, VRR as per specified in HDMI2.1) | 11 | Audio line out |
| 4 | DisplayPort 1.4 | 12 | USB Type-A downstream port (SuperSpeed USB 10Gbps, USB 3.2 Gen 2) |
| 5 | Stand lock | 13 | RJ45 port |
| 6 | DisplayPort 1.4 (out) | 14 | USB Type-A downstream port (SuperSpeed USB 10Gbps, USB 3.2 Gen 2) with BC1.2 power charging |
| 7 | Thunderbolt™ 4 downstream port (15W) for daisy-chaining | 15 | USB Type-C downstream port (SuperSpeed USB 10Gbps, USB 3.2 Gen 2) with power charging (15W) |
| 8 | Thunderbolt™ 4 upstream port (Video + Data). Alternate mode with DisplayPort 1.4, power delivery up to 90W. | | |

FEATURE	TECHNICAL SPECIFICATION
MODEL	Dell UltraSharp 27 Thunderbolt™ Hub Monitor - U2724DE
DIAGONAL VIEWING SIZE	684.70 mm (27.00 inches)
PRESET DISPLAY AREA (H X V)	596.74 mm x 335.66 mm (23.49" x 13.22")
PANEL TYPE	IPS Black Technology
DISPLAY SCREEN COATING	Anti-Glare with 3H hardness
MAXIMUM PRESET RESOLUTION	2560 x 1440 at 120 Hz
VIEWING ANGLE	178° vertical / 178° horizontal
PIXEL PITCH	0.2331 mm x 0.2331 mm
PIXEL PER INCH (PPI)	108.97
CONTRAST RATIO	2000 to 1 (typical)
ASPECT RATIO	16:9
BACKLIGHT TECHNOLOGY	LED
BRIGHTNESS	350 cd/m ² (typical)
RESPONSE TIME	8 ms (Normal) 5 ms (Fast)
AMBIENT LIGHT SENSOR	Yes, auto brightness and color temperature adjustment
CONNECTIVITY	<ul style="list-style-type: none"> 1 x DP 1.4 (DRR for Microsoft Windows) (Supports 2 x QHD 120Hz 8 bit) 1 x DP out 1 x HDMI (HDCP 1.4)(Supports up to QHD 2560 x 1440 120Hz TMDS, VRR as per specified in HDMI 2.1) 1 x Thunderbolt™ 4 downstream (15W) only suitable for video output under Daisy Chain 1 x Thunderbolt™ 4 upstream (Thunderbolt mode and alternate mode with DisplayPort 1.4, USB 3.2 Gen 2 upstream port, Power Delivery (PD) up to 90 W) 1 x USB-C upstream (Data only, USB 3.2 Gen 2, 10Gbps) 3 x USB-A (USB 3.2 Gen 2 10Gbps) 1 x audio lineout 1 x RJ45 (2.5GbE) <p>Quick Access:</p> <ul style="list-style-type: none"> 1 x USB-A (USB 3.2 Gen 2 10Gbps) with BC 1.2 1 x USB-C (USB 3.2 Gen 2 10Gbps, 15W)
ADJUSTABILITY	Height adjustable (150 mm) Tilt (-5° to 21°) Swivel (-45° to 45°) Pivot (-90° to 90°)
PBP / PIP	Yes
KEYBOARD, VIDEO AND MOUSE (KVM)	Yes
DAISY CHAIN AVAILABILITY	Yes
AUDIO OUTPUT	1 x Audio line-out ¹
BUILT-IN SPEAKER	No
DELL DISPLAY MANAGER COMPATIBILITY	Yes, Easy Arrange, Other key features

FEATURE	TECHNICAL SPECIFICATION
SPECIFICATIONS - SERVICE / SUPPORT DETAILS	3-Year Advanced Exchange Service and Premium Panel Exchange
COLOR GAMUT	<ul style="list-style-type: none"> 100% sRGB 100% BT.709 98% Display P3 98% DCI-P3 1.07 billion colors Delta E < 2 (average) (sRGB, BT.709, Display P3, DCI-P3)
HEIGHT WITH STAND (COMPRESSED ~ EXTENDED)	385.58 mm ~ 535.58 mm (15.18" ~ 21.09")
WIDTH WITH STAND	612.24 mm (24.10")
DEPTH WITH STAND	192.28 mm (7.57")
HEIGHT WITHOUT STAND	352.51 mm (13.88")
WIDTH WITHOUT STAND	612.24 mm (24.10")
DEPTH WITHOUT STAND	50.12 mm (1.97")
WEIGHT (PANEL ONLY - FOR VESA MOUNT)	5.23 kg (11.53 lb)
WEIGHT (WITH STAND ASSEMBLY AND CABLES)	7.37 kg (16.25 lb)
WEIGHT (WITH PACKAGING)	10.21 kg (22.51 lb)
SECURITY	Security lock slot (cable lock sold separately) Anti-theft stand lock slot (to lock stand to monitor using screw)
COMPLIANT STANDARDS	<ul style="list-style-type: none"> ENERGY STAR® certified monitor EPEAT® registered where applicable. EPEAT registration varies by country. See www.epeat.net for registration status by country. TCO Certified & TCO Certified Edge RoHS Compliant BFR/PVC Free monitor (excluding external cables). Arsenic-Free glass and Mercury-Free for the panel only
FLAT PANEL MOUNT INTERFACE	VESA mounting holes (100 mm x 100 mm - behind attached VESA Cover)
TEMPERATURE RANGE	Operating: 0°C to 40°C (32°F to 104°F) Non-operating: -20°C to 60°C (-4°F to 140°F)
HUMIDITY RANGE	Operating: 10% to 80% (non-condensing) Non-Operating: 5% to 90% (non-condensing)
ALTITUDE	Operating: 5000 m (16404 ft) max Non-Operating: 12192 (40000 ft) max
VOLTAGE REQUIRED	100 VAC to 240 VAC / 50 Hz or 60 Hz ± 3 Hz / 2.65 A (typical)
POWER CONSUMPTION NORMAL OPERATION	0.3 W (Off mode) ² 0.5 W (Standby mode) ² 1.5 W (Networked standby mode) ² 24.4 W (On mode) ² 225 W (Max.) ³ 18.9 W (Pon) ⁴ 65 kWh (TEC) ⁴
WHAT'S INCLUDED	Monitor, Stand Riser, Stand Base 1 x Power cable 1 x DP Cable (DP to DP) - 1.8 m 1 x USB-A to USB-C Gen 2 cable - 1 m 1 x Thunderbolt™ 4 cable - 1 m Quick setup guide Safety, Environmental and Regulatory Information Factory calibration report

1 Headphone usage is not supported for the audio line out connector.

2 As defined in EU 2019/2021 and EU 2019/2013.

3 Max brightness and contrast setting with maximum power loading on all USB ports.

4 Pon: Power consumption of On Mode as defined in Energy Star 8.0. TEC: Total energy consumption in kWh as defined in Energy Star 8.0 version.

Steadfast reliability

As the No. 1 monitor company worldwide*, we take pride in our unyielding commitment to quality and the utmost in customer satisfaction.

Premium Panel Exchange

Dell Premium Panel Exchange¹ allows a free monitor replacement during the Limited Hardware Warranty² period even if only one bright pixel is found.

Advanced Exchange Service

This monitor comes with a 3-year Advanced Exchange Service³ so that if a replacement becomes necessary, it will be shipped to you the next business day during your 3-year Limited Hardware Warranty.²

ProSupport

Upgrade to 24x7 specialized technical phone support with the Dell ProSupport option.⁴



* Dell monitors are #1 Worldwide for 9 years! Source: IDC Worldwide Quarterly PC Monitor Tracker, Q2 2023. From 2014 to 2023.

1 Applicable to Dell UltraSharp, P Series, and C Series desktop monitors.

2 For copy of Ltd Hardware Warranty, write to Dell USA LP, Attn: Warranties, One Dell Way, Round Rock, TX 78682 or see <https://www.dell.com/warranty>.

3 Advanced Exchange: Dell will send you a replacement monitor the next business day in most cases, if deemed necessary after phone/online diagnosis. Shipping times may vary by location and for monitors 55" and above. Fee charged for failure to return defective unit. See [dell.com/servicecontracts/global](https://www.dell.com/servicecontracts/global).

4 Availability varies, please visit www.dell.com/support for details. In some countries, hours for in-region support may vary. Support after local business hours may be provided in a language other than the local language.

Technical specifications subject to change without prior notice. Product availability varies by country. Please contact your Dell representative for more information.

© 2023 Dell Inc. or its subsidiaries. All Rights Reserved. Dell Technologies, Dell, EMC, Dell EMC and other trademarks are trademarks of Dell Inc. or its subsidiaries. Other trademarks may be trademarks of their respective owners. USB Type-C® and USB-C® are registered trademarks of USB Implementers Forum. Thunderbolt and the Thunderbolt logo are trademarks of Intel Corporation in the U.S. and/or other countries.