


# Delock Riser Card PCI Express x1 to 1 x PCI 32 Bit 5 V Slot Asmedia

## Description

The PCI Express riser card by Delock enables the connection of one **PCI card** via one PCI Express interface. The **recess in the slot bracket** allows an external connection of e.g. cables to the built-in PCI card in the computer case.

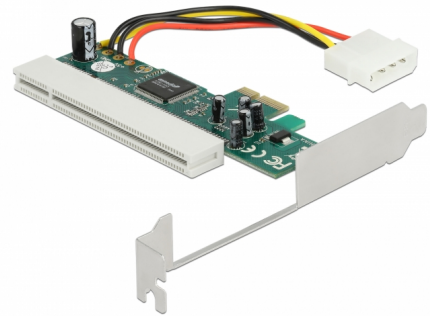

**Item no. 90062**

EAN: 4043619900626

Country of origin: China

Package: Box

## Specification

- Connectors:
  - 1 x PCI Express x1 >
  - 1 x 32-Bit PCI
  - 1 x power connector 4 pin Molex male
- Chipset: Asmedia ASM1083
- Bootable

## System requirements


- Linux Kernel 5.4 or above
- Windows 8.1/8.1-64/10/10-64
- Windows Server 2019
- PC with one free PCI Express slot

## Package content

- PCIe riser card
- User manual

---

## Images

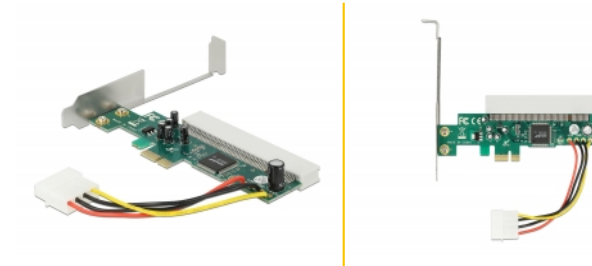

## General

Function:	bootable
-----------	----------

## Interface

Connector 1:	1 x PCI Express x1
Connector 2:	1 x 32-Bit PCI
connector 3:	1 x power connector 4 pin Molex male

## Technical characteristics

Chipset:	Asmedia ASM1083
----------	-----------------