



EV2495-BK

Your advantages


The EV2495: a declaration of performance. Thanks to its USB-C ports and USB-C daisy chain functionality, the EV2495 ensures there are fewer cables and more freedom on the desk. Laptop and tablet users, in particular, benefit from the EV2495's docking functionality. The USB-C ports make it a piece of cake to go between the office and the home office. Users only need to connect a single cable to the computer to transmit audio, video, data, LAN signals and any other connected monitors as well as provide charging power. Its virtually frameless design, unparalleled image quality and uncompromising ergonomics also make it shine. The EV2495 has two USB upstream ports that can be used as a keyboard/mouse switch. Only a single computer and mouse need to be connected to the monitor in order to operate two computers and any other chained monitors. For example, when working from home, the signal source can be easily switched between a private PC and company computer. Connectivity that captivates.

- 24-inch monitor with a 16:10 aspect ratio, 1920 x 1200 pixels and IPS technology for outstanding image quality
- Docking functionality for tablets, laptops and smartphones thanks to USB 3.1 Type-C connectivity supplying a DisplayPort signal, LAN and power charging of 70 watts (max.)
- Bezel only 1 mm: amazingly compact and ultra-sleek design
- 1000:1 contrast ratio, brightness: 350 cd/m², 178° viewing angle
- Auto EcoView, EcoView Index and EcoView Optimizer for maximum power savings and superb ergonomics
- USB-C daisy chain functionality (USB-C output) for connecting multi-screen solutions
- Signal inputs: USB-C (Display Port Alt Mode), Display Port, HDMI
- Production that is proven to be environmentally friendly and socially responsible



Cutting-edge connectivity with USB-C

Video and audio reproduction, rapid data transfer, including network signal and power supply for connected devices – all this and so much more is possible with a single USB-C cable. The EV2495-BK will become your central docking station to which you can quickly and easily connect your laptop. This is especially practical if you have multiple workstations or switch between working in an office and at home. The 70-watt power supply via USB-C reliably charges small computers or laptops, giving you more desk space since an additional power supply is no longer necessary for the computer.

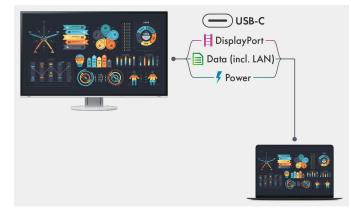

USB-C: compatibility information

For information on compatibility between PCs and FlexScan monitors when using a USB-C connection, please visit the EIZO Global website.

Efficient multi-display solution

The monitor's USB-C ports enable multiple monitors to be connected to the computer via a single cable (using the daisy chain method). This allows for a hassle-free configuration of up to four screens and reduces cable clutter. Being able to view and edit several applications simultaneously also improves comfort and increases efficiency when working.

Did you know, computers and monitors with a DisplayPort connection can also be connected to USB-C? The right cable for this from our optional accessories is called CP200.

Cleverly chosen multi-screen solutions

Multiscreen solutions look particularly good when all monitors are similar in design and have an almost frameless UltraSlim

format. This is easily achieved by using the USB-C daisy chain and linking several EV2495s.

Because there is no need for further chaining from the last screen, the cheaper sister model EV2485 is recommended for this. It can do without the USB-C down port, LAN connection and KVM switch. The design and stand of the EV2495 and EV2485 are identical.



One monitor, many ports

The EV2495-BK is equipped with one USB-C port and three USB-A downstream ports for connecting various periphery devices without needing a USB hub. This is useful, for example, if your laptop only has a limited number USB ports or want to optimise the set-up of workstations for hot desking or in a home office environment. The monitor also has USB-C, HDMI and Display Port video inputs for total connection flexibility.






Information on daisy chain compatibility

Are you unsure whether the daisy chain method is compatible with your system? EIZO tests PCs that are currently available on the market to ensure that they are compatible with the daisy chain method and FlexScan monitors.

 Find out more about compatibility tests for the EV2495 (link to the international EIZO website)
 How to set up a daisy chain connection (link to the international EIZO website)

LAN port to ensure a stable network connection

The monitor has a dedicated LAN port to ensure a stable wired network connection. Laptops and PCs require only one USB cable to be connected to the EV2495-BK to gain network access via the monitor. This is particularly advantageous for laptops that do not have a LAN connection and allows for fast and stable data transfer, which is required for video conferences, for example. As a network device the monitor has its own MAC address.

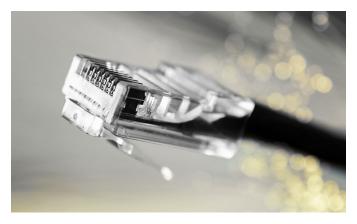


KVM switch: two PCs, one user

It has never been easier to use two PCs simultaneously. The EV2495-BK has an integrated KVM (Keyboard Video Mouse) switch for both its USB upstream ports and can be used as a keyboard/mouse switch. For example, a single monitor or even multiple chained monitors can be shared between a private and a company computer when working from home. This ensures that work is uninterrupted and makes for a tidy work area.

Maximum image quality thanks to the IPS panel

The monitor is capable of all three key elements of excellent image quality: excellent resolution of 1920×1200 pixels, maximum contrast of 1000:1, and stable brightness of up to 350 cd $/m^2$. That means you will experience razor-sharp text contours, brilliant graphics, and clear images. Thanks to the high-quality IPS panels with LED backlight, contrasts and colours remain stable from every viewing angle.



Overdrive to quickly change images

Fast, faster, overdrive. The overdrive function accelerates switching time so that the grey-grey change takes only 5 ms on average. You can watch films and rapidly changing images without annoying afterglow.



Without overdrive: streaking and time delay



Precise colour control

An image can only be perfect if the colours are, too. This is why EIZO office monitors have a 10-bit look-up table at a minimum, which allows the colour information to be assigned much more precisely than with conventional 8-bit LUTs. The finest colour gradations ensure that gradients are always perfectly displayed, while also offering customised adjustment options. For example, you can adjust the white balance from 4000 K to 10000 K in 500-K intervals.






Look-Up-Table with 10 and more bit

Look-Up-Table with 8 bit

Elegant design

The monitor's appearance can be the key to creating a pleasant working atmosphere. Whether you are at home or in the office, the monitor's virtually frameless design and ergonomic functionality allows it to fit naturally into your workplace environment. The housing is available in both an elegant black and in white, with matching white cables.



Controls integrated into bezel

Electrostatic switches are integrated into the front of the EV2495-BK instead of mechanical buttons. This ensures ease of use while also giving the monitor an extremely elegant look. The speakers and all the controls are also built into the bezel, pointing forward in the direction of the user. They are fully integrated into the monitor's flat, nearly frameless design to offer an excellent user experience.



Save electricity and your eyes with Auto EcoView

At day, at night, bright, dark: No matter when and how you work, the Auto EcoView function continuously measures changes of the ambient light and optimises the monitor with ideal brightness values automatically by using a sensor. The benefits: Annoying glare is reduced, your eyes will not get tired as quickly. A special two-point control takes into account the brightest and darkest environment over the course of the day with the respectively desired screen brightness. Another advantage: Thanks to the automatic brightness adjustment, you will save up to 50% of your electricity costs in comparison to a monitor that is permanently operated at maximum brightness.

Of course, you can also continue to configure the monitor manually. EcoView Index is used for orientation on how environmentally friendly and economical your settings are.



During the day



In the evening




Flicker free: for the sake of the eyes

To help protect your eyes, EIZO has developed a hybrid technology to control the backlight. This combines the benefits of the otherwise standard PWM (pulse width modulation) and DC (direct current) control. The PWM control uses much higher frequencies than standard PWM methods. The result: a flicker-free viewing experience while maintaining picture quality and colour stability. In addition, compared to pure DC control, you can adjust the brightness to less than 1% of the maximum value in darkly lit rooms. The benefit: Your screen remains free from glare even under these conditions.

The flicker-free and low blue light content of the EIZO FlexScan monitors is certified by TÜV Rheinland. Learn more about why eyes get tired when working at the computer.

Anti-glare coating: more image, less reflection

The EV2495-BK offers a perfect, non-glare surface. By minimising glare by diffusing the reflected light, the EV2495-BK effectively protects your eyes from straining. This keeps your eyes from getting as tired and allows you to sit comfortably in front of the monitor, without having to sit in a forced position to prevent glare.




Less blue light

Bright, blue light emitted by LED backlights of some monitors can be detrimental to workspace ergonomics. When editing documents, paper mode simulates reading on actual paper by using the appropriate settings for contrast, brightness and colour temperature. This reduces the amount of blue light. When used in combination with the Auto EcoView brightness settings, blue light is reduced by a total of up to 80%.




Flexible stand

Ergonomic and stable: the adjustable stand has ergonomics in focus. You can turn, swivel, and tilt the monitor in the way that is most comfortable for your back, neck and sitting posture. It can be continuously adjusted in height and lowered almost to the table or the base of the stand. This allows you to position the top row of the picture ergonomically below eye level.




182.2 mm



Swivel 344°



Tilt Tilt down 5°, tilt up 35°




Rotation Rotation 90° (clockwise and anticlockwise)




Preset colour modes: optimised display at the touch of a button

Pre-set colour modes optimise the viewing of images, texts or films. Because it makes a difference whether you are watching a film, editing a picture, surfing the net, or writing texts. At the touch of a button, you set the respective pre-set for brightness, gamma correction and colour temperature. For example, the Paper mode simulates the pleasant contrast of printed paper, which is easy on the eyes when reading and prevents fatigue.



Operation made easy thanks to the Button Guide

The Button Guide provides all functions at a glance. Touching the button is enough and the screen will show all functions and the corresponding control panel.

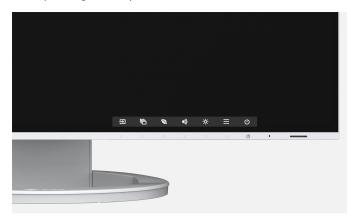

Screen InStyle


In addition to the on-screen menu, you can conveniently control the EV2495-BK by using the Screen InStyle software on a Windows PC. The configuration options include colour reproduction, energy saving options, and ergonomic functions. In multi-screen systems, the settings can be applied synchronously to all connected screens with Screen InStyle.

Learn more about Screen InStyle here.

System administrators can centrally manage and control monitors connected in the network with Screen InStyle installed using the Screen InStyle Server application. This optimises power consumption and simplifies asset management of the monitors. Learn more about Screen InStyle Server here.

Monitor Configurator for company-wide monitor setting

The work simplification for network administrators: The software enables you to configure several monitors uniformly in one step via their USB connection. You save time and get the same settings for many monitors. The configuration can be saved as an XML file and transferred to the clients.

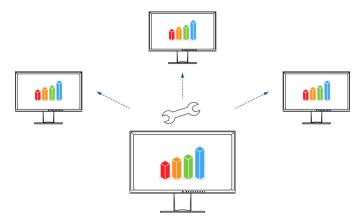

Save up to 30% of energy with the EcoView Optimizer


Save electricity without compromising quality: The EcoView Optimizer reduces the background lighting fully automatically for dark images. This reduces electricity consumption by up to 30%. At the same time, the signal is amplified and the colour tone values adjusted. The result: You will enjoy the image quality you are used to but consume less power.





Zero-watt consumption thanks to the power switch

The monitors have an integrated mechanical power switch, which is extremely practical and energy-saving: If you switch off the monitor using the power switch, the device will stop consuming any power at all. Moreover, it consumes a maximum of 0.5 watt in standby mode.

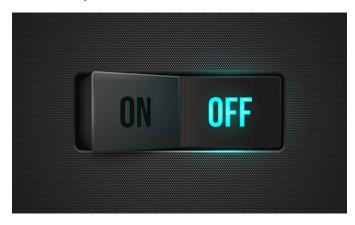

Socially responsible production

The EV2495-BK is produced in a socially responsible way. It is free of child labour and forced labour. Suppliers along the supply chain have been carefully selected and they have also committed themselves to produce in a socially responsible way. This applies in particular to conflict minerals. We present a detailed report about our social responsibility annually and voluntarily.

Learn more about responsible corporate behaviour at EIZO here.



Environmentally and climate friendly

Each EV2495-BK is manufactured in our own factory, which implements an environmental management system in accordance with ISO 14001. This includes measures to reduce waste, wastewater and emissions, resource and energy consumption, as well as to encourage environmentally conscious behaviour among employees. We publicly report on these measures on an annual basis as a main component of our CSR (Corporate Social Responsibility) report.



Sustainable and durable

The EV2495-BK is designed for a long service life that takes into account the entire lifecycle and impact on the environment. It is generally well above the five-year guarantee. Spare parts are available up to five years after the end of production. The monitor's long service life and the ability to repair it save resources and the climate. When designing the EV2495-BK we paid attention to reducing resource consumption by using high-quality components and materials and being meticulous in production. The packaging of the EV2495-BK consists of cardboard box made of 85% recycled paper, while the transport padding is even 100% recycled material.





A natural beauty

Reducing the use of volatile organic compounds (VOCs) found in material production, such as some paints, is a global concern.

EIZO uses its expertise cultivated from extensive years of research to manufacture its monitor cabinets with a smooth, uniform colour and texture without using paint.





Compliance with standards and guidelines

The monitor is certified according to important and all-encompassing sustainability standards such as TCO Certified Generation 9, EPEAT and ENERGY STAR[®]. The EV2495-BK is a safe investment, when taking into account issues such as ESG (Environmental, social and corporate governance) or SDG (Sustainable Development Goals) from the United Nations and following the necessary guidelines.



Five-year warranty

EIZO grants a five-year warranty*. This is possible thanks to the highly developed production process based on a simple principle of success: sophisticated and innovative monitor technology, made from high-end materials.

* in Belgium: including on-site replacement service



Specification

Item no.	EV2495-BK	Signal inputs	USB-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort
Case color	Black	eigna nipeis	(HDCP 1.3), HDMI (HDCP 1.4)
Areas of application	Office, Gaming	Signal outputs/Daisy chain compatibil-	USB-C
Product line	FlexScan	ity	
EAN	4995047056539	USB specification	USB 3.1 Gen 1
Variants	EV2495-WT (Colour: White)	USB upstream ports	1 x type C (DisplayPort Alt Mode, LAN, 70 W max.), type B
		USB downstream ports	1 x type C (DisplayPort Alt Mode, 15 W max.), 3 x type
Display		LAN standards	RJ-45 (LAN pass through), IEEE802.3ab (1000BASE- IEEE802.3u (100BASE-TX), IEEE802.3(10BASE-T)
Screen size [in inches]	24.1	Video signal	USB-C, DisplayPort, HDMI (RGB, YUV)
Screen size [in cm]	61.1	Audio input	USB-C, DisplayPort, HDMI
Format	16:10	Audio output	3.5 mm stereo jack
Viewable image size (width x height)	518 x 324		
Ideal and recommended resolution	1920 x 1200	Electric data	
Pixel pitch [mm]	0.270 x 0.270		
Pixel density [ppi]	94	Frequency	USB-C: 31-76 kHz/59-61 Hz, DisplayPort: 31-76 kH 59-61 Hz, HDMI: 31-76 kHz/ 49-51 Hz/49-61 Hz
Resolution supported	1920 x 1200, 1680 x 1050, 1600 x 1200, 1280 x 1024, 1024 x 768, 800 x 600, 720 x 400, 640 x 480	Power consumption (typical) [in watt]	11
Panel technology	IPS	Maximum Power Consumption [in	156 (at maximum brightness with all signal inputs and ports in use)
Max. viewing angle horizontal	178 °	watt] Power Save Mode [in watt]	0.5
Max. viewing angle vertical	178 °	Power Save Mode [in watt]	
Number of colours or greyscale	16.7 million colours (USB-C, 8 Bit), 16.7 million colours	Power consumption off [in watt]	0
	(DisplayPort, 8 Bit), 16.7 million colours (HDMI, 8 Bit)	Energy efficiency class	C
Colour palette/look-up table	More than 1.06 billion hues/14-bit	Energy consumption/1000h [in kWh]	12
Max. colour space (typical)	sRGB	Power supply	AC 100-120 V / 200-240 V, 50/60 Hz
Max. brightness (typical) [in cd/m²]	350	Power management	\checkmark
Max. dark room contrast (typical)	1000:1		
Response time grey-grey alternation (typical) [in ms]	5	Dimensions & weights Dimensions [mm]	531 x (356 - 538) x 230
Max. refresh rate [in hertz]	60		7.6
Backlight	LED	Weight [in kilograms]	531 x 344 x 54
		Dimensions without stand [mm]	
Features & control		Weight without stand [in kilograms]	4.9
USB-C docking	\checkmark	Housing dimension details	Dimension drawing (PDF)
LAN/RJ-45	\checkmark	Swivel	344 °
KVM switch	\checkmark	Incline forward/backward	5°/35°
Preset colour/greyscale modes	sRGB, Paper, DICOM, Movie, 2x free modes for user	Pivot	✓ 90° (clockwise and anti-clockwise)
	selection	Height adjustment range [mm]	182.2
DICOM tone curve	\checkmark	Hole spacing	VESA standard 100 x 100 mm
RadiCS application classes	VIII		
Auto EcoView	\checkmark	Software & accessories	
EcoView Index	\checkmark	Accompanying software and other ac-	Screen InStyle
EcoView Optimizer	\checkmark	cessories are available for download	
	v	Additional supply	Power cord, Signal cable USB-C – USB-C (5 A), Quic
Overdrive			guide, Cable protection
•	v V		
Overdrive No flickering thanks to hybrid controls		Accessories	
Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI)		Accessories	HH200PR-K (HDMI (High Definition Multimedia Interficable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort
Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder		Accessories	cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm), PP200-K (DisplayPort cab
Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification		Accessories	cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm), PP200-K (DisplayPort cab 200 cm), EIZO ScreenCleaner (for the best possible cl
Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Built-in speakers		Accessories	cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm), PP200-K (DisplayPort cab
Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Built-in speakers OSD language	✓ ✓ ✓ ✓ de, en, fr, es, it, se	Accessories	cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm), PP200-K (DisplayPort cab 200 cm), EIZO ScreenCleaner (for the best possible cl without scratching the monitor), CC100-BK (Short USE port cable, 100 cm), CP200-BK (USB-C to DisplayPo cable, 200 cm), PCSK-03-BK (Thin client mount for th
Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Built-in speakers	de, en, fr, es, it, se Brightness, Contrast, Gamma, All EcoView functions, Colour saturation, Colour temperature, Resolution, Colour Mode, Colour tone, Overdrive, Volume, Audio source, Signal input, OSD language, Interpolation, Audio input	Warranty	cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm), PP200-K (DisplayPort cab 200 cm), EIZO ScreenCleaner (for the best possible cl without scratching the monitor), CC100-BK (Short USE
Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Built-in speakers OSD language Adjustment options	 de, en, fr, es, it, se Brightness, Contrast, Gamma, All EcoView functions, Colour saturation, Colour temperature, Resolution, Colour Mode, Colour tone, Overdrive, Volume, Audio source, Signal input, OSD language, Interpolation, Audio input (USB-C, DisplayPort/HDMI) 		cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm), PP200-K (DisplayPort cab 200 cm), EIZO ScreenCleaner (for the best possible cl without scratching the monitor), CC100-BK (Short USE port cable, 100 cm), CP200-BK (USB-C to DisplayPo cable, 200 cm), PCSK-03-BK (Thin client mount for th
Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Built-in speakers OSD language Adjustment options	de, en, fr, es, it, se Brightness, Contrast, Gamma, All EcoView functions, Colour saturation, Colour temperature, Resolution, Colour Mode, Colour tone, Overdrive, Volume, Audio source, Signal input, OSD language, Interpolation, Audio input (USB-C, DisplayPort/HDMI)	Warranty	cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm), PP200-K (DisplayPort cab 200 cm), EIZO ScreenCleaner (for the best possible cl without scratching the monitor), CC100-BK (Short USE port cable, 100 cm), CP200-BK (USB-C to DisplayPo cable, 200 cm), PCSK-03-BK (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5)
Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Built-in speakers OSD language	 de, en, fr, es, it, se Brightness, Contrast, Gamma, All EcoView functions, Colour saturation, Colour temperature, Resolution, Colour Mode, Colour tone, Overdrive, Volume, Audio source, Signal input, OSD language, Interpolation, Audio input (USB-C, DisplayPort/HDMI) 	Warranty Warranty and service	cable), PM200-K (DisplayPort cable to transfer digita video and audio signals.), PP100-K (Short DisplayPor connection cable, 100 cm), PP200-K (DisplayPort 200 cm), EIZO ScreenCleaner (for the best possible c without scratching the monitor), CC100-BK (Short US) port cable, 100 cm), CP200-BK (USB-C to DisplayPo cable, 200 cm), PCSK-03-BK (Thin client mount for th stand EIZO FlexStand 4/FlexStand 5)
Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Built-in speakers OSD language Adjustment options	de, en, fr, es, it, se Brightness, Contrast, Gamma, All EcoView functions, Colour saturation, Colour temperature, Resolution, Colour Mode, Colour tone, Overdrive, Volume, Audio source, Signal input, OSD language, Interpolation, Audio input (USB-C, DisplayPort/HDMI)	Warranty Warranty and service Terms *) Maximum of 30,000 hours of operation	cable), PM200-K (DisplayPort cable to transfer digita video and audio signals.), PP100-K (Short DisplayPor connection cable, 100 cm), PP200-K (DisplayPort 200 cm), EIZO ScreenCleaner (for the best possible c without scratching the monitor), CC100-BK (Short US) port cable, 100 cm), CP200-BK (USB-C to DisplayPo cable, 200 cm), PCSK-03-BK (Thin client mount for th stand EIZO FlexStand 4/FlexStand 5)

Antwerpsesteenweg 22 2860 Sint-Katelijne-Waver (Mechelen)

Phone: (32) (0)15-64.55.11 www.eizo.be/en

Data sheet created on 12.06.2022