




## EV2795-BK

### Your advantages




Thanks to its USB-C ports and USB-C daisy chain functionality, the EV2795 ensures that there are fewer cables and more freedom on the desk. Its virtually frameless design also makes it shine. This impressive monitor boasts unparalleled image quality, ergonomics and a range of modern connection options, meaning it is perfectly suited to satisfy your requirements for the office and for at home. Laptop and tablet users will be impressed by the monitor's fully functional docking station, which includes a LAN connection and charging port for the computer. Dual-screen systems can be set up easily using USB-C daisy chain. The two USB upstream ports allow the EV2795 to be used as a keyboard/mouse switch. For example, if both a private PC and company computer are connected to the monitor in your home office, both computers can be operated with a single keyboard and mouse and with any other chained monitors.

- ✓ 27-inch monitor with 2560 x 1440 pixels and fine resolution of 109 ppi
- ✓ Docking functionality for tablets, laptops and smartphones thanks to USB 3.1 Type-C connectivity supplying a DisplayPort signal, LAN and power charging of 70 watts (max.)
- ✓ Bezel only 1 mm: amazingly compact and ultra-sleek design
- ✓ 1000:1 contrast ratio, brightness: 350 cd/m<sup>2</sup>, 178° viewing angle
- ✓ Auto EcoView, EcoView Index and EcoView Optimizer for maximum power savings and superb ergonomics
- ✓ USB-C daisy chain functionality (USB-C output) for connecting another monitor
- ✓ Signal inputs: USB-C (Display Port Alt Mode), Display Port, HDMI
- ✓ Production that is proven to be environmentally friendly and socially responsible

## Features

### Cutting-edge connectivity with USB-C

Video and audio reproduction, rapid data transfer, including network signal and power supply for connected devices – all this and so much more is possible with a single USB-C cable. The EV2795-BK will become your central docking station to which you can quickly and easily connect your laptop. This is especially practical if you have multiple workstations or switch between working in an office and at home. The 70-watt power supply via USB-C reliably charges small computers or laptops, giving you more desk space since an additional power supply is no longer necessary for the computer.

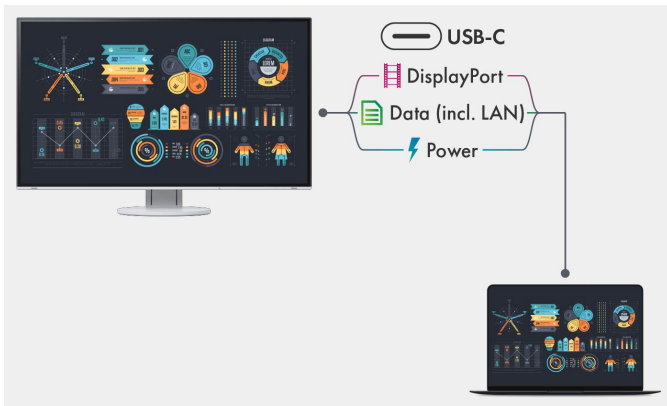


### USB-C: compatibility information


For information on compatibility between PCs and FlexScan monitors when using a USB-C connection, [please visit the EIZO Global website](#).

### Efficient multi-display solution

The monitor's USB-C ports enable multiple monitors to be connected to the computer via a single cable (using the daisy chain method). This allows for a hassle-free configuration of up to two screens and reduces cable clutter. Being able to view and edit several applications simultaneously also improves comfort and increases efficiency when working.



Daisy chain method  
Tidied-up cables



Conventional solution  
Messy cabling

### Information on daisy chain compatibility

Are you unsure whether the daisy chain method is compatible with your system? EIZO tests PCs that are currently available on the market to ensure that they are compatible with the daisy chain method and FlexScan monitors.

1. [Find out more about compatibility tests for the EV2795 \(link to the international EIZO website\)](#)
2. [How to set up a daisy chain connection \(link to the international EIZO website\)](#)

### One monitor, many ports

The EV2795-BK is equipped with one USB-C port and three USB-A downstream ports for connecting various peripheral devices without needing a USB hub. This is useful, for example, if your laptop only has a limited number of USB ports or you want to optimise the set-up of workstations for hot desking or in a home office environment. The monitor also has USB-C, HDMI and Display Port video inputs for total connection flexibility.



### KVM switch: two PCs, one user

It has never been easier to use two PCs simultaneously. The EV2795-BK has an integrated KVM (Keyboard Video Mouse) switch for both its USB upstream ports and can be used as a keyboard/mouse switch. For example, a single monitor or even multiple chained monitors can be shared between a private and a company computer when working from home. This ensures that work is uninterrupted and makes for a tidy work area.

## Features


### LAN port to ensure a stable network connection

The monitor has a dedicated LAN port to ensure a stable wired network connection. Laptops and PCs require only one USB cable to be connected to the EV2795-BK to gain network access via the monitor. This is particularly advantageous for laptops that do not have a LAN connection and allows for fast and stable data transfer, which is required for video conferences, for example. As a network device the monitor has its own MAC address.




### Maximum image quality thanks to the IPS panel

The monitor is capable of all three key elements of excellent image quality: excellent resolution of 2560 x 1440 pixels, maximum contrast of 1000:1, and stable brightness of up to 350 cd/m<sup>2</sup>. That means you will experience razor-sharp text contours, brilliant graphics, and clear images. Thanks to the high-quality IPS panels with LED backlight, contrasts and colours remain stable from every viewing angle.

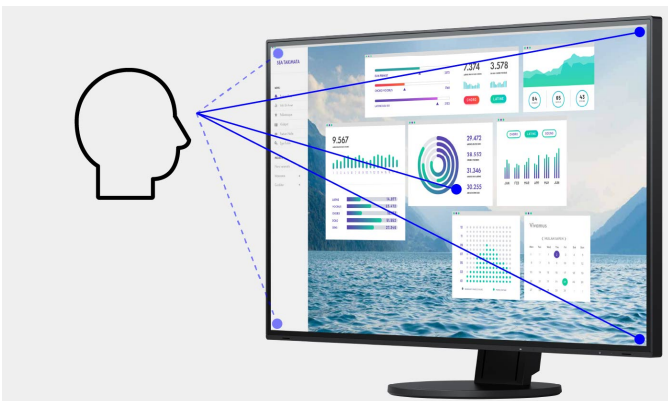


### Precise colour control

An image can only be perfect if the colours are, too. This is why EIZO office monitors have a 10-bit look-up table at a minimum, which allows the colour information to be assigned much more precisely than with conventional 8-bit LUTs. The finest colour gradations ensure that gradients are always perfectly displayed, while also offering customised adjustment options. For example, you can adjust the white balance from 4000 K to 10000 K in 500-K intervals.



Look-Up-Table with 10 and more bit



Look-Up-Table with 8 bit

### Elegant design

The monitor's appearance can be the key to creating a pleasant working atmosphere. Whether you are at home or in the office, the monitor's virtually frameless design and ergonomic functionality allows it to fit naturally into your workplace environment. The housing is available in both an elegant black and in white, with matching white cables.



## Features

### Overdrive to quickly change images

Fast, faster, overdrive. The overdrive function accelerates switching time so that the grey-grey change takes only 5 ms on average. You can watch films and rapidly changing images without annoying afterglow.



Without overdrive: streaking and time delay

### Controls integrated into bezel

Electrostatic switches are integrated into the front of the EV2795-BK instead of mechanical buttons. This ensures ease of use while also giving the monitor an extremely elegant look. The speakers and all the controls are also built into the bezel, pointing forward in the direction of the user. They are fully integrated into the monitor's flat, nearly frameless design to offer an excellent user experience.



### Save electricity and your eyes with Auto EcoView

At day, at night, bright, dark: No matter when and how you work, the Auto EcoView function continuously measures changes of the ambient light and optimises the monitor with ideal brightness values automatically by using a sensor. The benefits: Annoying glare is reduced, your eyes will not get tired as quickly. A special two-point control takes into account the brightest and darkest environment over the course of the day with the respectively desired screen brightness. Another advantage: Thanks to the automatic brightness adjustment, you will save up to 50% of your electricity costs in comparison to a monitor that is permanently operated at maximum brightness.

Of course, you can also continue to configure the monitor manually. EcoView Index is used for orientation on how environmentally friendly and economical your settings are.




During the day



In the evening

### Anti-glare coating: more image, less reflection

The EV2795-BK offers a perfect, non-glare surface. By minimising glare by diffusing the reflected light, the EV2795-BK effectively protects your eyes from straining. This keeps your eyes from getting as tired and allows you to sit comfortably in front of the monitor, without having to sit in a forced position to prevent glare.

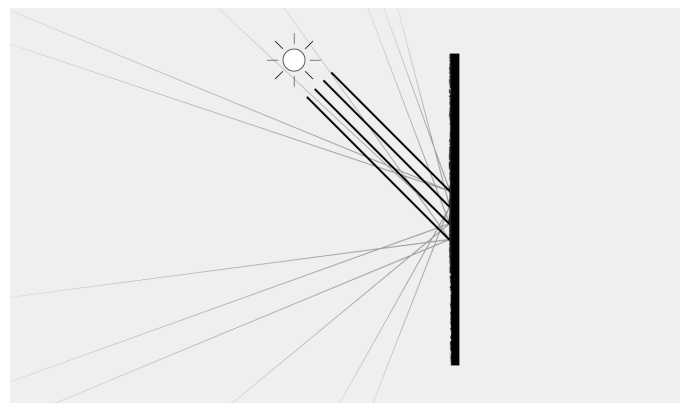

## Features

### Flicker free: for the sake of the eyes

To help protect your eyes, EIZO has developed a hybrid technology to control the backlight. This combines the benefits of the otherwise standard PWM (pulse width modulation) and DC (direct current) control. The PWM control uses much higher frequencies than standard PWM methods. The result: a flicker-free viewing experience while maintaining picture quality and colour stability. In addition, compared to pure DC control, you can adjust the brightness to less than 1% of the maximum value in darkly lit rooms. The benefit: Your screen remains free from glare even under these conditions.

The flicker-free and low blue light content of the EIZO FlexScan monitors is certified by TÜV Rheinland. [Learn more about why eyes get tired when working at the computer.](#)

### Less blue light


Bright, blue light emitted by LED backlights of some monitors can be detrimental to workspace ergonomics. When editing documents, paper mode simulates reading on actual paper by using the appropriate settings for contrast, brightness and colour temperature. This reduces the amount of blue light. When used in combination with the Auto EcoView brightness settings, blue light is reduced by a total of up to 80%.




### Flexible stand

Ergonomic and stable: the adjustable stand has ergonomics in focus. You can turn, swivel, and tilt the monitor in the way that is most comfortable for your back, neck and sitting posture. It can


be continuously adjusted in height and lowered almost to the table or the base of the stand. This allows you to position the top row of the picture ergonomically below eye level.




Height  
176.6 mm



Tilt  
Tilt down 5°, tilt up 35°




Swivel  
344°



Rotation  
Rotation 90° (clockwise and anti-clockwise)

### Preset colour modes: optimised display at the touch of a button


Pre-set colour modes optimise the viewing of images, texts or films. Because it makes a difference whether you are watching a film, editing a picture, surfing the net, or writing texts. At the touch of a button, you set the respective pre-set for brightness, gamma correction and colour temperature. For example, the Paper mode simulates the pleasant contrast of printed paper, which is easy on the eyes when reading and prevents fatigue.

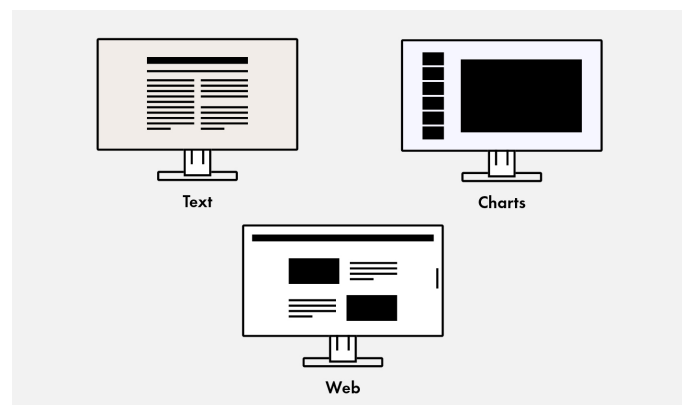

## Features

### Operation made easy thanks to the Button Guide

The Button Guide provides all functions at a glance. Touching the button is enough and the screen will show all functions and the corresponding control panel.

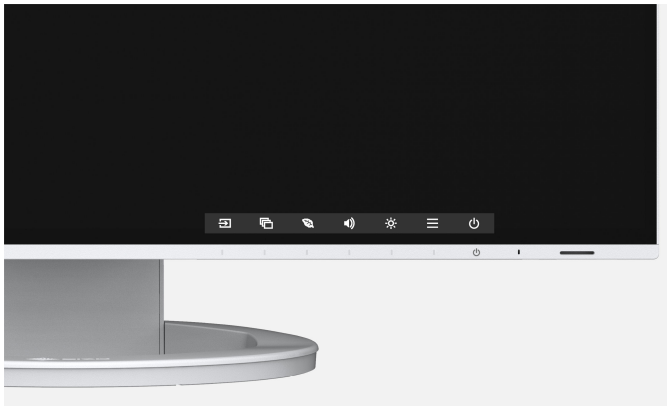

### Screen InStyle

In addition to the on-screen menu, you can conveniently control the EV2795-BK by using the Screen InStyle software on a Windows PC. The configuration options include colour reproduction, energy saving options, and ergonomic functions. In multi-screen systems, the settings can be applied synchronously to all connected screens with Screen InStyle.

[Learn more about Screen InStyle here.](#)


System administrators can centrally manage and control monitors connected in the network with Screen InStyle installed using the Screen InStyle Server application. This optimises power consumption and simplifies asset management of the monitors.

[Learn more about Screen InStyle Server here.](#)

### Monitor Configurator for company-wide monitor setting

The work simplification for network administrators: The software enables you to configure several monitors uniformly in one step

via their USB connection. You save time and get the same settings for many monitors. The configuration can be saved as an XML file and transferred to the clients.

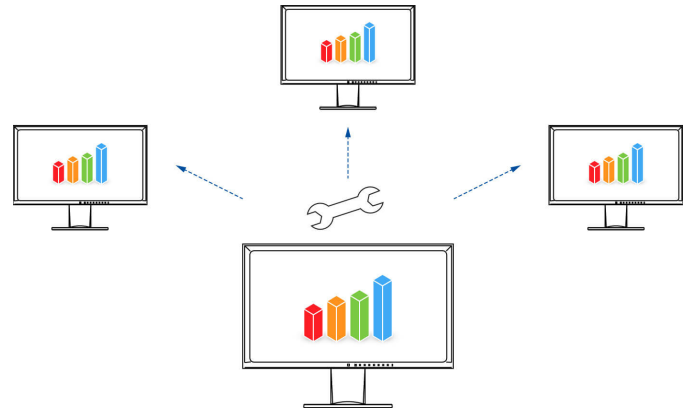

### Save up to 30% of energy with the EcoView Optimizer


Save electricity without compromising quality: The EcoView Optimizer reduces the background lighting fully automatically for dark images. This reduces electricity consumption by up to 30%. At the same time, the signal is amplified and the colour tone values adjusted. The result: You will enjoy the image quality you are used to but consume less power.



## Features

### Zero-watt consumption thanks to the power switch

The monitors have an integrated mechanical power switch, which is extremely practical and energy-saving: If you switch off the monitor using the power switch, the device will stop consuming any power at all. Moreover, it consumes a maximum of 0.5 watt in standby mode.

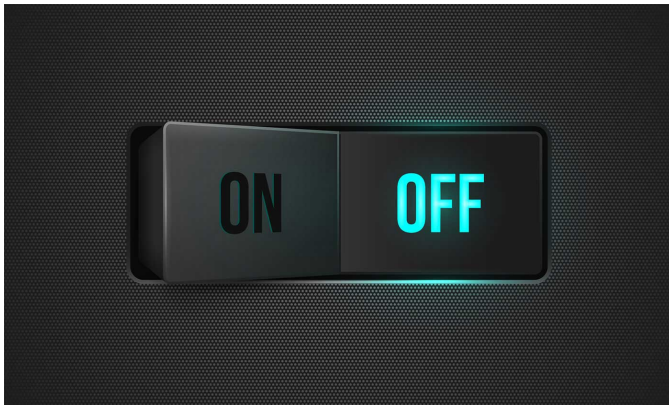

### Socially responsible production

The EV2795-BK is produced in a socially responsible way. It is free of child labour and forced labour. Suppliers along the supply chain have been carefully selected and they have also committed themselves to produce in a socially responsible way. This applies in particular to conflict minerals. We present a detailed report about our social responsibility annually and voluntarily.

[Learn more about responsible corporate behaviour at EIZO here.](#)



### Environmentally and climate friendly

Each EV2795-BK is manufactured in our own factory, which implements an environmental management system in accordance with ISO 14001. This includes measures to reduce waste, wastewater and emissions, resource and energy consumption, as well as to encourage environmentally conscious behaviour among employees. We publicly report on these measures on an annual basis as a main component of our CSR (Corporate Social Responsibility) report.



### Sustainable and durable

The EV2795-BK is designed for a long service life that takes into account the entire lifecycle and impact on the environment. It is generally well above the five-year guarantee. Spare parts are available up to five years after the end of production. The monitor's long service life and the ability to repair it save resources and the climate. When designing the EV2795-BK we paid attention to reducing resource consumption by using high-quality components and materials and being meticulous in production. The packaging of the EV2795-BK consists of cardboard box made of 85% recycled paper, while the transport padding is even 100% recycled material.



## Features

### A natural beauty


Reducing the use of volatile organic compounds (VOCs) found in material production, such as some paints, is a global concern.

EIZO uses its expertise cultivated from extensive years of research to manufacture its monitor cabinets with a smooth, uniform colour and texture without using paint.



### Compliance with standards and guidelines

The monitor is certified according to important and all-encompassing sustainability standards such as TCO Certified Generation 9, EPEAT and ENERGY STAR®. The EV2795-BK is a safe investment, when taking into account issues such as ESG (Environmental, social and corporate governance) or SDG (Sustainable Development Goals) from the United Nations and following the necessary guidelines.

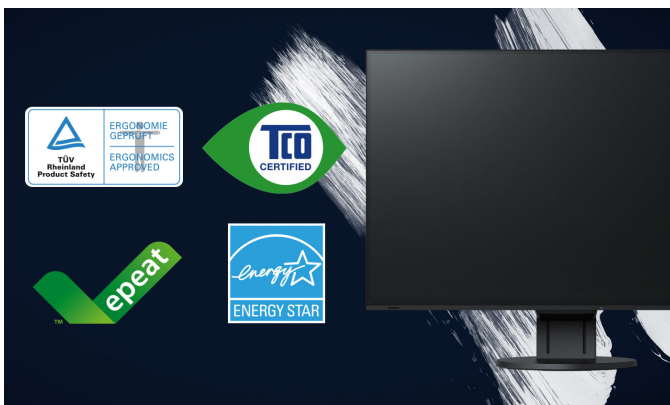

### Five-year warranty

EIZO grants a five-year warranty\*. This is possible thanks to the highly developed production process based on a simple principle of success: sophisticated and innovative monitor technology, made from high-end materials.

\* in Belgium: including on-site replacement service



# Specification

## General

|                      |   |
|----------------------|---|
| Item no.             | EV2795-BK                                 |
| Case color           | Black                                     |
| Areas of application | Office, Gaming                            |
| Product line         | FlexScan                                  |
| EAN                  | 4995047056638                             |
| Variants             | <a href="#">EV2795-WT</a> (Colour: White) |

## Display

|   |   |
|---|---|
| Screen size [inches]  | 27  |
| Screen size [in cm]   | 68.5  |
| Format  | 16:9  |
| Viewable image size (width x height)                          | 597 x 336   |
| Ideal and recommended resolution                              | 2560 x 1440   |
| Pixel pitch [mm]  | 0.233 x 0.233   |
| Pixel density [ppi]   | 109   |
| Resolution supported  | 2560 x 1440, 1920 x 1200, 1920 x 1080 (Full HD), 1680 x 1050, 1600 x 1200, 1280 x 1024, 1024 x 768, 800 x 600, 720 x 400, 640 x 480 |
| Panel technology  | IPS   |
| Max. viewing angle horizontal                                 | 178 °   |
| Max. viewing angle vertical                                   | 178 °   |
| Number of colours or greyscale                                | 16.7 million colours (DisplayPort, 8 Bit), 16.7 million colours (HDMI, 8 Bit)   |
| Colour palette/look-up table                                  | More than 1.06 billion hues/14-bit  |
| Max. colour space (typical)                                   | sRGB  |
| Max. brightness (typical) [in cd/m <sup>2</sup> ]             | 350   |
| Max. dark room contrast (typical)                             | 1000:1  |
| Response time grey-grey alternation (typical) [in ms]         | 5   |
| Response time black-white-black alternation (typical) [in ms] | 14  |
| Max. refresh rate [in hertz]                                  | 60  |
| Backlight   | LED   |

## Features & control

|   |  |
|---|--|
| USB-C docking                           | ✓  |
| LAN/RJ-45                               | ✓  |
| KVM switch                              | ✓  |
| Preset colour/greyscale modes           | sRGB, Paper, DICOM, Movie, 2x free modes for user selection  |
| DICOM tone curve                        | ✓  |
| RadiCS application classes              | VIII   |
| Auto EcoView                            | ✓  |
| EcoView Index                           | ✓  |
| EcoView Optimizer                       | ✓  |
| Overdrive                               | ✓  |
| No flickering thanks to hybrid controls | ✓  |
| Signal range amplifier (HDMI)           | ✓  |
| HDCP Decoder                            | ✓  |
| Input signal identification             | ✓  |
| Built-in speakers                       | ✓  |
| OSD language                            | de, en, fr, es, it, se   |
| Adjustment options                      | Brightness, Contrast, Gamma, All EcoView functions, Colour saturation, Colour temperature, Resolution, Colour Mode, Colour tone, Overdrive, Volume, Audio source, Signal input, OSD language, Interpolation, Audio input (USB-C, DisplayPort/HDMI) |
| Button Guide                            | ✓  |
| Integrated power unit                   | ✓  |

## Warranty

|                      |                   |
|----------------------|-------------------|
| Warranty and service | 5 years warranty* |
|----------------------|-------------------|

## Ports

|  |  |
|--|--|
| Signal inputs                            | USB-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort (HDCP 1.3), HDMI (HDCP 1.4)                  |
| Signal outputs/Daisy chain compatibility | USB-C  |
| USB specification                        | USB 3.1 Gen 1  |
| USB upstream ports                       | 1 x type C (DisplayPort Alt Mode, LAN, 70 W max.), 1 x type B                                    |
| USB downstream ports                     | 1 x type C (DisplayPort Alt Mode, 15 W max.), 3 x type A   |
| LAN standards                            | RJ-45 (LAN pass through), IEEE802.3ab (100BASE-T), IEEE802.3u (100BASE-TX), IEEE802.3 (10BASE-T) |
| Video signal                             | USB-C, DisplayPort, HDMI (RGB, YUV)  |
| Audio input                              | USB-C, DisplayPort, HDMI   |
| Audio output                             | 3.5 mm stereo jack   |

## Electric data

|                                       |   |
|---------------------------------------|---|
| Frequency                             | USB-C: 31-89 kHz/59-61 Hz, DisplayPort: 31-89 kHz/59-61 Hz, HDMI: 31-89 kHz/49-51 Hz/59-61 Hz |
| Power consumption (typical) [in watt] | 16  |
| Maximum Power Consumption [in watt]   | 164 (at maximum brightness with all signal inputs and USB ports in use)                       |
| Power Save Mode [in watt]             | 0.5   |
| Power consumption off [in watt]       | 0   |
| Energy efficiency class               | D   |
| Energy consumption/1000h [in kWh]     | 16  |
| Power supply                          | AC 100-120 V / 200-240 V, 50/60 Hz  |
| Power management                      | ✓   |

## Dimensions & weights

|                                     |   |
|-------------------------------------|---|
| Dimensions [mm]                     | 611 x (369 - 545) x 230                 |
| Weight [in kilograms]               | 8.5                                     |
| Dimensions without stand [mm]       | 611 x 357 x 56                          |
| Weight without stand [in kilograms] | 5.7                                     |
| Housing dimension details           | <a href="#">Dimension drawing (PDF)</a> |
| Swivel                              | 344 °                                   |
| Incline forward/backward            | 5 ° / 35 °                              |
| Pivot                               | ✓ 90 ° (clockwise and anti-clockwise)   |
| Height adjustment range [mm]        | 176.6                                   |
| Hole spacing                        | VESA standard 100 x 100 mm              |

## Certification & standards

|               |  |
|---------------|--|
| Certification | CE, CB, TCO Certified Generation 9, EPA ENERGY STAR <sup>®</sup> , TÜV/GS, TÜV/Ergonomics (including ISO 9241-307)***, TÜV/Blue Low Light Content, TÜV/Flicker Free, EPEAT 2018 (US), cTÜVus, TÜV/S, EAC, PSE, FCC-B, CAN ICES-3 (B), RCM, VCCI-B, CCC, RoHS, China RoHS, WEEE |
|---------------|--|

## Software & accessories

|  |  |
|--|--|
| Accompanying software and other accessories are available for download | Screen InStyle   |
| Additional supply  | Power cord, Signal cable USB-C – USB-C (5 A), Quick guide, Cable protection  |
| Accessories  | EIZO ScreenCleaner (for the best possible clean without scratching the monitor), HH200PR-K (HDMI (High Definition Multimedia Interface) cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), CC100-BK (Short USB-C port cable, 100 cm), CP200-BK (USB-C to DisplayPort cable, 200 cm), PP200-K (DisplayPort cable, 200 cm), PP100-K (Short DisplayPort connection cable, 100 cm), PCSK-03-BK (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5) |

## Terms

\* ) Maximum of 30,000 hours of operation from the date of purchase. \*\* ) Zero pixel error guarantee for completely lit sub-pixels (partial pixels ISO 9241-307). Valid: six months from the purchase date.