


S/FTP Cat. 6A LSZH patch cord, green, 0.25 m

PP6A-LSZHCU-G-0.25M

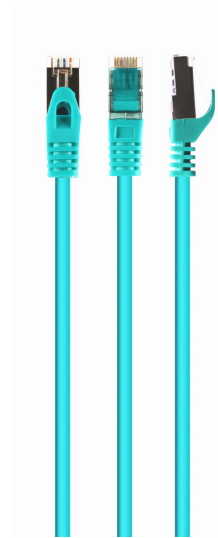

- Perfect connection
- Dual shielded for a reliable connection
- Low Smoke Zero Halogen (LSZH) jacket
- Gold plated contacts

Features

- Patch cord with foil shielded pairs and braided cable, CAT 6A
- Gold plated contacts
- Low Smoke Zero Halogen (LSZH) jacket
- Molded strain reliefs
- Snagless boots

Packaging

| | |
|--------------------------------|----------------|
| Q'ty in crtn, pcs | 500 |
| Crtn volume, CUM | 0.04 |
| Crtn weight, kgs | 10.62 |
| Individual package size LxWxH: | 125x10x175 mm |
| Carton size LxWxH: | 400x300x330 mm |
| Country of origin | CN |
| Barcode | 8716309091299 |
| Customs code | 8544421000 |

Certificates



Specifications

Category: category 6A
Type: SSTP (dual shielded)
Frequency bandwidth: Max. 500 MHz
Compliance with ANSI / TIA / EIA-568B standards
Conductor: AWG 27 (7 x 0.135 mm wire), CU
Conductor insulation: FM-PE 1.0 mm
Shielding: AL foil + braid shield (16 x 4/0.12 mm)
LDPE filler: yes
Polyester tape: yes
Drain wire: n/a
Jacket material: LSZH
Jacket braiding: n/a
Jacket outer diameter: 6.2 mm
Length: conform item description
Color: conform item description