


## VI-K46P IP Video Intercom Kit

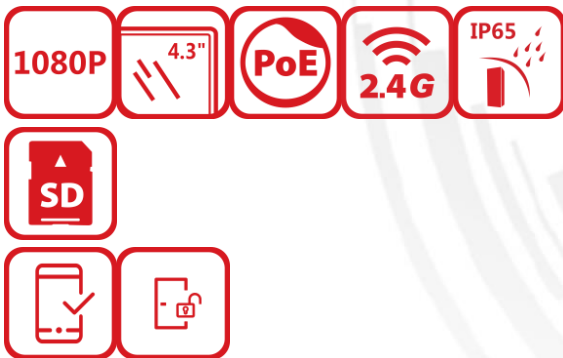

- Convenient Hik-Connect APP Mobile Control
- One call button for easier calls
- Standard PoE power supply
- IP65 protection level
- Including: VI-V400W × 1, VI-H440W × 1, VI-V400-RS × 1, PSU × 2

## ▪ Specification

<b>Door station</b>	
Processor	Embedded high performance processor
Operation system	Linux
ROM	32 MB
RAM	256 MB
<b>Door station</b>	
Supplement light	IR light, up to 3 m
Resolution	Main stream: 1920 × 1080p Sub stream: 704 × 576p
Lens	2MP HD camera
Wide dynamic range (WDR)	120 dB
Field of view	Horizontal: 131°, Vertical: 78°
Video Compression Standard	H.264
<b>Door station</b>	
Audio input	1 built-in omnidirectional microphone
Audio output	1 built-in loudspeaker
Volume adjustment	Adjustable
Audio quality	Noise suppression and echo cancellation
Audio compression standard	G.711 U
Audio compression Rate	64 Kbps
<b>Door station</b>	
User capacity	2000
Linked indoor station capacity	16
Card capacity	10000
<b>Door station</b>	
Network protocol	TCP/IP, RSTP
<b>Door station</b>	
Network interface	1 RJ-45, 10/100 Mbps self-adaptive
RS-485	1
Alarm input	4
Lock control	1 relay, Max. 30 VDC 2 A
Exit button	1
Door contact input	1
TAMPER	1
<b>Door station</b>	
Button	1 physical button(s)
Power consumption	< 10 W
Working temperature	-40 °C to 55 °C (-40 °F to 131 °F)
Working humidity	10% to 95% (no-condensing)
Dimension	138 mm × 65 mm × 27 mm (5.4" × 2.6" × 1.1")
Installation	Surface mounting
Protection level	IP65
Indicator	2



Power supply	IEEE802.3af, standard PoE 12 VDC
Application environment	Outdoor
Weight	Net weight: 0.190 kg; Gross weight: 0.414 kg
<b>Indoor station</b>	
Operation system	Embedded Linux operation system
RAM	128 MB
ROM	16 MB
Processor	Embedded processor
<b>Indoor station</b>	
Display resolution	480 × 272
Operation method	Capacitive touch screen with 9 touch buttons
Screen size	4.3-inch colorful TFT screen
Type	Colorful TFT screen
<b>Indoor station</b>	
Video compression standard	/
Resolution	/
Lens	/
Wide dynamic range (WDR)	/
FOV	/
<b>Indoor station</b>	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Audio compression standard	G.711 U, G.711 A
Volume adjustment	Adjustable
Audio compression bitrate	64 Kps
<b>Indoor station</b>	
Notice capacity	200
Linked indoor extensions capacity	16
<b>Indoor station</b>	
Wi-Fi	Wi-Fi 802.11 b/g/n, 2.4 GHz
Network protocol	TCP/IP, SIP, RTSP
<b>Indoor station</b>	
Network interface	1 RJ-45 10/100 Mbps self-adaptive
<b>Indoor station</b>	
Power consumption	≤ 4 W
Button	9 physical button
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Power supply	IEEE802.3af, Standard PoE, 12 VDC
Working humidity	10% to 95% (no-condensing)
Dimension (L x W x H)	200 mm × 140 mm × 15.1 mm (7.9" × 5.5" × 0.6")
Dimension (W × H × D)	120 mm × 120 mm × 21 mm (4.7" × 4.7" × 0.83")
Installation	Wall mounting, table mounting

Application environment	Indoor
Protective level	/
Weight	With package: 336.6 g Without package: 197.8 g
Language	English, French, Portuguese, Portuguese (Brazil), Spanish, Russian, German, Italian, Polish, Turkish, Vietnamese, Arabic, Czech, Hungarian, Dutch, Romanian, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Lithuanian, Estonian, Latvian, Norwegian Danish, Slovenian, Slovak, Swedish, Finnish, Traditional Chinese, Mongolian, Hebrew, Kazakh, Uzbek


## ▪ Available Model

VI-K46P

## ▪ Dimension

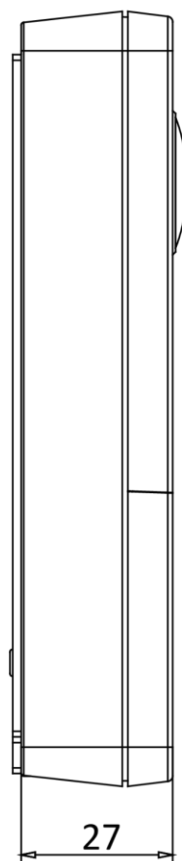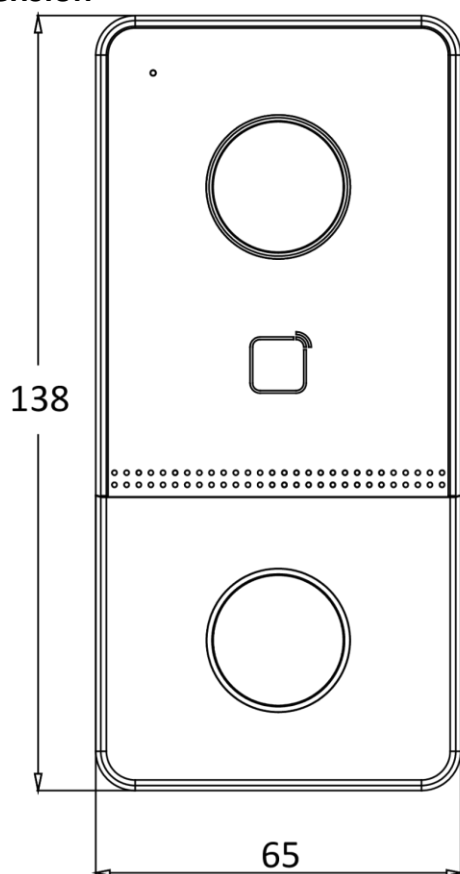

Unit:mm

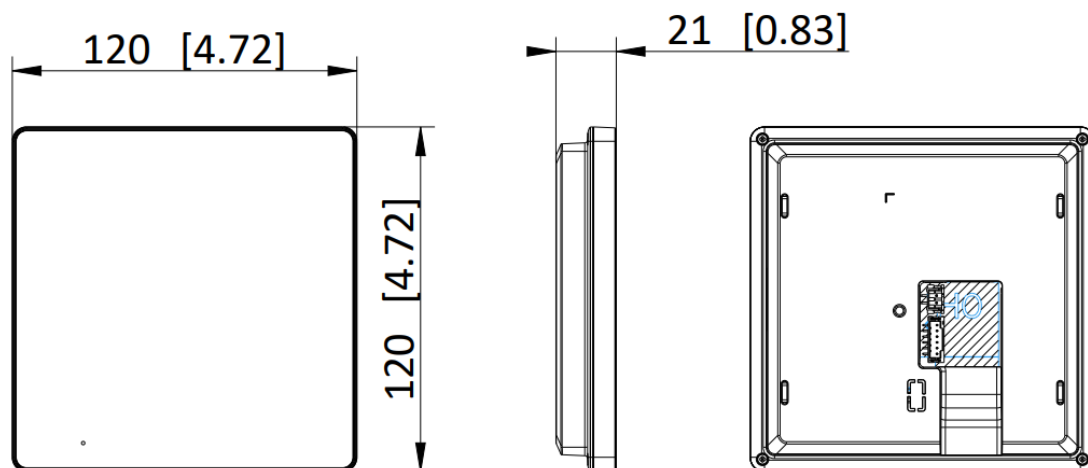

Unit:mm [inch]

SCALE	1:1
-------	-----

- Accessory
- Included

**VI-V400-RS**  
**Protective shield**





#### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
Technical Support: support@hikvision.com

Follow us on social media to get the latest product and solution information.

