

CP-WX410



MULTIPURPOSE WXGA LCD PROJECTOR

Virtually maintenance free multipurpose projector.

Performance

- 16:10 aspect ratio for ultimate laptop compatibility
- 3000 ANSI Lumens with optical zoom
- Full connectivity including HDMI
- Quick Start and Instant Off
- Auto vertical keystone
- Input Source Naming
- My Button
- 10W x 1 speaker
- Whiteboard Mode and Blackboard Mode
- Anti Theft features:
 - PIN-Lock
 - MyScreen Lock
 - Transition Detector

Cost of ownership

- 4000 hour filter cleaning cycle
- Extended hybrid filter life
- No additional filter cleaning costs
- Virtually maintenance free
- Easy setup and installation

Environment

- Reduced carbon footprint by extended service intervals
- The hybrid filter reduces electronic waste

Hitachi have formulated an "Environmental Vision" to contribute towards building a sustainable society through business and product development.

Our goal is to develop life-enhancing technology that will contribute to and realise a truly sustainable society for current and future generations.



HITACHI
Inspire the Next

CP-WX410 Technical specifications

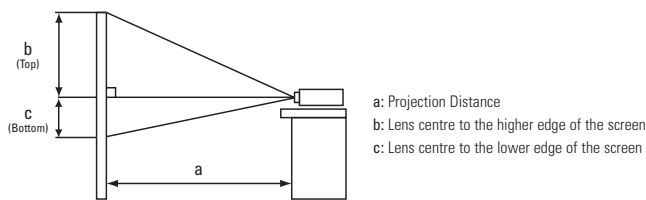
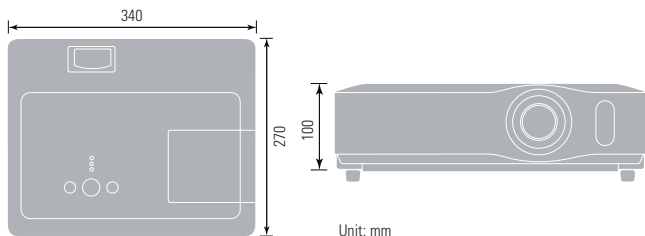


Image Size 4:3				
Screen Size (Diagonal)	Projection Distance (a)		Screen Height (cm)	
	min. (m)	max. (m)	b (top)	c (bottom)
40" (1.0)	1.2	1.4	55	6
60" (1.5)	1.8	2.1	82	9
100" (2.5)	3.0	3.6	137	15
150" (3.8)	4.5	5.4	206	23
200" (5.1)	6.0	7.2	274	30
300" (7.6)	9.0	10.8	411	46

OPTICAL

LCD Panel	0.59" P-Si TFT x 3
Resolution	WXGA 1280 x 800
Brightness	Normal Mode 3000 ANSI Lumens
	Eco Mode 2500 ANSI Lumens
Contrast Ratio	500:1
Lens	Manual focus, manual zoom x 1.2
Lamp	220W UHB
Lamp Life	3000 (Normal)/4000 (Eco)
Projection Distance	0.9-11.4m
Distance to Width Ratio (:1)	1.5-1.8
Diagonal Display Size	30-300" (60"@1.9m, wide)
Number of Colour	8 Bit/colour, 16.7M colours
Optical Keystone	9:1 upward shift, fixed

COMPATIBILITY

Computer Compatibility	IBM Compatible VGA, SVGA, XGA, WXGA, SXGA, UXGA compressed, MAC 16"
Video Compatibility	NTSC/PAL/SECAM/PAL-M,N/NTSC4.43 SDTV: 525i(480i), 525p(480p), 625i(576i) HDTV: 750p (720p@60Hz), 1125i(1080i@50/60Hz)
Plug & Play	DDC2B
Frequency Range	31.5-106KHz horizontal/56-120Hz vertical

FEATURES

Speakers	10W mono
Other	Freeze, magnifying, blank, auto adjustment, search, page up & down (for USB mouse function), equalizing gamma correction, 2-3 pull down, Progressive Scan, noise reduction, auto V keystone +/-30 degrees, MyScreen, My Memory, My Button, blackboard/whiteboard mode, day time mode, input source naming (English), resolution setting, My Text function (English), audio pass through, AV mute in, My Button, template mode, saving mode, easy lamp replace from top, air filter on side, Quick ON (4 sec), Direct ON, Direct Off, PIN-Lock, MyScreen PIN-Lock, keypad Lock, Kensington slot, transition detector, security bar, serial number label on side
OSD Languages	MENU: 17 languages

CONNECTIONS

Computer Input	2 x 15-pin Mini D-sub 1 x HDMI
Computer Output	1 x 15-pin Mini D-sub
Video Input	1 x RCA jack 1 x S-Video jack 3 x RCA jack (for Component)
Audio Input	2 x Stereo Mini jack 1 pair RCA(L/R) (Selectable on OSD)
Audio Output	1 x Stereo Mini Jack
Control and Mouse	1 x 9-pin D-sub for RS232 control 1 x USB type B for mouse control

POWER

Power Supply	100-120V/220-240V, auto switching
Power Consumption	320W

PHYSICAL

Dimensions (W x H x D)	340 x 100 x 270mm (excluding protrusions)
Weight	3.5Kg/7.7lbs
Noise Level	35dB/29dB
Air Filter	Hybrid

MISCELLANEOUS

Lamp indicator light, power light, ceiling mount image, rear projection Image

CERTIFICATION

UL60950/C-UL, FCC Part 15 Class B, CE, AS/NZS CISPR22 Class B

ACCESSORIES SUPPLIED

Remote control with batteries (no laser pointer), computer cable, power cord, user manual (detailed & concise), lens cap (& strap), security label, AV cable

OPTIONAL ACCESSORIES

Replacement Lamp	DT00911
------------------	---------

Image Size 16:10

Screen Size (Diagonal)	Projection Distance (a)		Screen Height (cm)	
	min. (m)	max. (m)	b (top)	c (bottom)
40" (1.0)	1.3	1.5	51	-2
60" (1.5)	1.9	2.3	77	-2
100" (2.5)	3.2	3.9	129	-4
150" (3.8)	4.9	5.8	193	-6
200" (5.1)	6.5	7.8	257	-8
300" (7.6)	9.8	11.7	386	-12



HITACHI DIGITAL MEDIA, Hitachi Europe Ltd, Whitebrook Park, Lower Cookham Road, Maidenhead, Berkshire SL6 8YA UNITED KINGDOM
Tel: +44 (0)1628 585 000 Fax: +44 (0)1628 585 500 www.hitachidigitalmedia.com

The specification above and photography is for reference only and may be subject to change.

The 'HD Ready' logo is a trademark of EICTA. HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC.

