

Memory Module Specifications

KSM26ES8/16HA

16GB 1Rx8 2G x 72-Bit PC4-2666

CL19 288-Pin DIMM

DESCRIPTION

Kingston's KSM26ES8/16HA is a 2G x 72-bit (16GB) DDR4-2666 CL19 SDRAM (Synchronous DRAM), 1Rx8, ECC, memory module, based on nine 2G x 8-bit FBGA components. The SPD is programmed to JEDEC standard latency DDR4-2666 timing of 19-19-19 at 1.2V. Each 288-pin DIMM uses gold contact fingers. The electrical and mechanical specifications are as follows:

FEATURES

- Power Supply: VDD = 1.2V Typical
- VDDQ = 1.2V Typical
- VPP = 2.5V Typical
- VDDSPD = 2.2V to 3.6V
- Nominal and dynamic on-die termination (ODT) for data, strobe, and mask signals
- Data transfer rates: PC4-2933, PC4-2666, PC4-2400, PC4-2133, PC4-1866, PC4-1600
- Low-power auto self refresh (LPASR)
- Data bus inversion (DBI) for data bus
- On-die VREFDQ generation and calibration
- Single-rank
- On-board I2 serial presence-detect (SPD) EEPROM
- Temperature sensor with integrated SPD
- 16 internal banks; 4 groups of 4 banks each
- Fixed burst chop (BC) of 4 and burst length (BL) of 8 via the mode register set (MRS)
- Selectable BC4 or BL8 on-the-fly (OTF)
- Fly-by topology
- Terminated control command and address bus
- PCB: Height 1.23" (31.25mm)
- RoHS Compliant and Halogen-Free

SPECIFICATIONS

CL(IDD)	19 cycles
Row Cycle Time (tRCmin)	45.75ns(min.)
Refresh to Active/Refresh Command Time (tRFCmin)	350ns(min.)
Row Active Time (tRASmin)	32ns(min.)
Maximum Operating Power	*
UL Rating	94 V - 0
Operating Temperature	0° C to +85° C
Storage Temperature	-55° C to +100° C

*See IDD Specifications (page 2)

Module Assembly

DRAM: HYNIX (A-DIE)




Continued >>

IDD Specifications

IDD		unit
Symbol	2666	
IDD0	404	mA
IDD0A	404	mA
IDD1	470	mA
IDD1A	497	mA
IDD2N	323	mA
IDD2NA	323	mA
IDD2NT	367	mA
IDD2NL	222	mA
IDD2NG	318	mA
IDD2ND	310	mA
IDD2NP	333	mA
IDD2P	214	mA
IDD2Q	297	mA
IDD3N	489	mA
IDD3NA	489	mA
IDD3P	388	mA
IDD4R	1186	mA
IDD4RA	1207	mA
IDD4RB	1199	mA
IDD4W	1020	mA
IDD4WA	1060	mA
IDD4WB	966	mA
IDD4WC	1016	mA
IDD4WP	1251	mA
IDD5B	3538	mA
IDD5F2	2469	mA
IDD5F4	2037	mA
IDD6N	296	mA
IDD6E	445	mA
IDD6R	168	mA
IDD6A	445	mA
IDD7	1263	mA
IDD8	126	mA

IPP		unit
Symbol	2666	
IPP0	19	mA
IPP1	19	mA
IPP2N	12	mA
IPP2P	12	mA
IPP3N	18	mA
IPP3P	18	mA
IPP4R	18	mA
IPP4W	18	mA
IPP5B	589	mA
IPP5F2	389	mA
IPP5F4	318	mA
IPP6N	38	mA
IPP6E	65	mA
IPP6R	20	mA
IPP6A	57	mA
IPP7	75	mA
IPP8	12	mA

MODULE DIMENSIONS

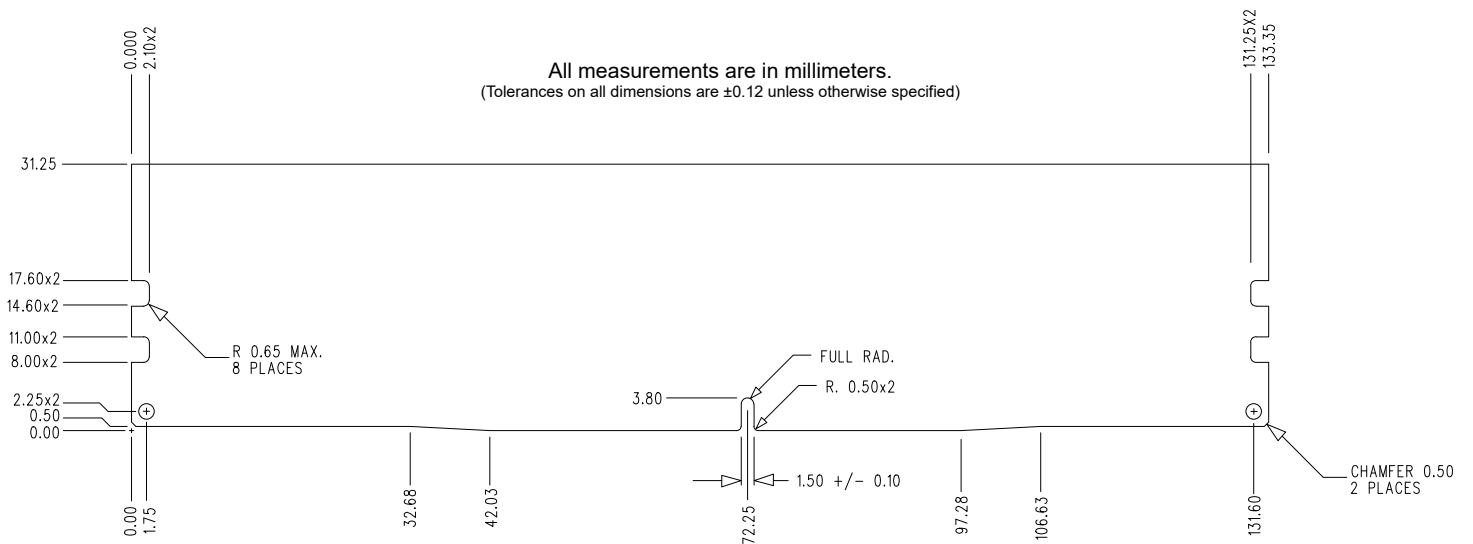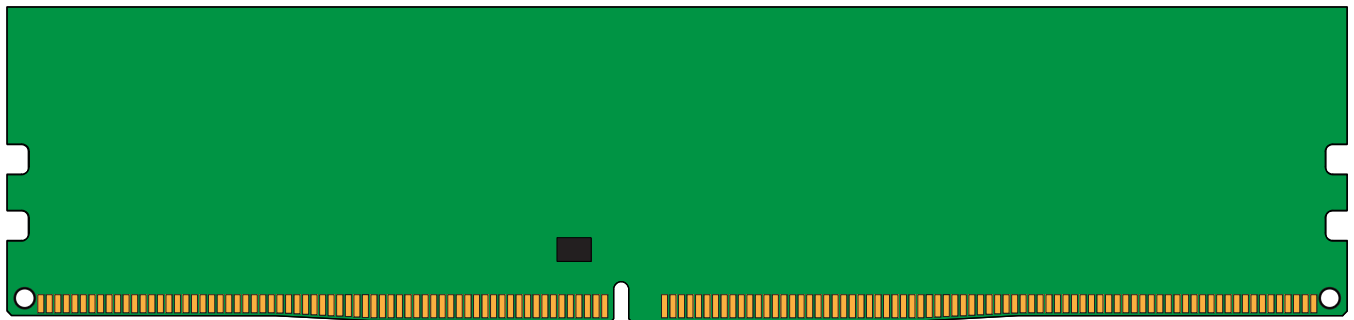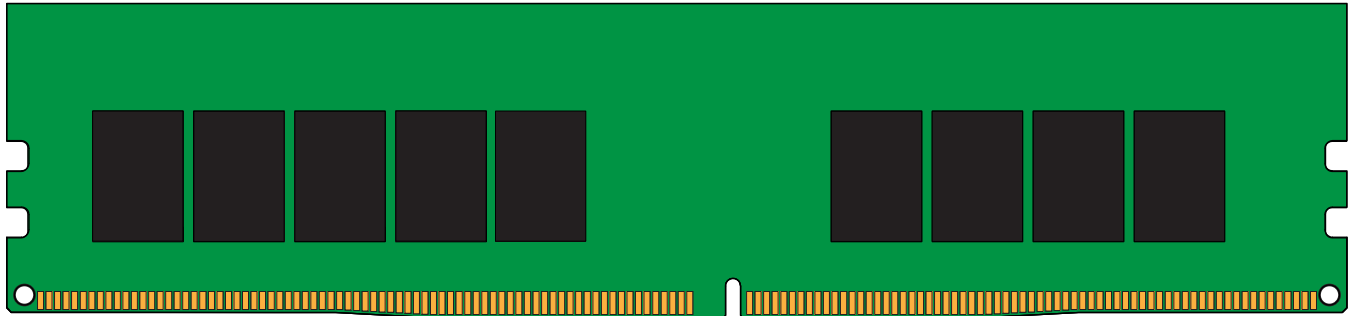

The product images shown are for illustration purposes only and may not be an exact representation of the product. Kingston reserves the right to change any information at anytime without notice.