

Memory Module Specifications

KSM32ED8/32ME

32GB 2Rx8 4G x 72-Bit PC4-3200
CL22 288-Pin DIMM

DESCRIPTION

Kingston's KSM32ED8/32ME is a 4G x 72-bit (32GB) DDR4-3200 CL22 SDRAM (Synchronous DRAM), 2Rx8, ECC, memory module, based on eighteen 2G x 8-bit FBGA components. The SPD is programmed to JEDEC standard latency DDR4-3200 timing of 22-22-22 at 1.2V. Each 288-pin DIMM uses gold contact fingers. The electrical and mechanical specifications are as follows:

FEATURES

- Power Supply: VDD = 1.2V Typical
- VDDQ = 1.2V Typical
- VPP = 2.5V Typical
- VDDSPD = 2.2V to 3.6V
- Nominal and dynamic on-die termination (ODT) for data, strobe, and mask signals
- Low-power auto self refresh (LPASR)
- Data bus inversion (DBI) for data bus
- On-die VREFDQ generation and calibration
- Dual-rank
- On-board I₂S serial presence-detect (SPD) EEPROM
- Temperature sensor with integrated SPD
- 16 internal banks; 4 groups of 4 banks each
- Fixed burst chop (BC) of 4 and burst length (BL) of 8 via the mode register set (MRS)
- Selectable BC4 or BL8 on-the-fly (OTF)
- Fly-by topology
- Terminated control command and address bus
- PCB: Height 1.23" (31.25mm)
- RoHS Compliant and Halogen-Free

SPECIFICATIONS

CL(IDD)	22 cycles
Row Cycle Time (tRCmin)	45.75ns(min.)
Refresh to Active/Refresh Command Time (tRFCmin)	350ns(min.)
Row Active Time (tRASmin)	32ns(min.)
Maximum Operating Power	*
UL Rating	94 V - 0
Operating Temperature	0° C to +85° C
Storage Temperature	-55° C to +100° C

*See IDD Specifications (page 2)

Module Assembly

DRAM: MICRON (E-DIE)

Continued >>


continued

IDD Specifications

Symbol	3200	Units
I _{DD0}	882	mA
I _{PP0}	45	mA
I _{DD1}	981	mA
I _{DD2N}	810	mA
I _{DD2NT}	801	mA
I _{DD2P}	684	mA
I _{DD2Q}	756	mA
I _{DD3N}	1098	mA
I _{PP3N}	36	mA
I _{DD3P}	900	mA
I _{DD4R}	1800	mA
I _{DD4W}	1494	mA
I _{DD5R}	954	mA
I _{PP5R}	54	mA
I _{DD6N}	684	mA
I _{DD6E}	2034	mA
I _{DD6R}	360	mA
I _{DD6A (25°C)}	198	mA
I _{DD6A (45°C)}	360	mA
I _{DD6A (75°C)}	918	mA
I _{DD6A (95°C)}	2034	mA
I _{PP6X}	954	mA
I _{DD7}	2007	mA
I _{PP7}	90	mA
I _{DD8}	648	mA

continued

MODULE DIMENSIONS

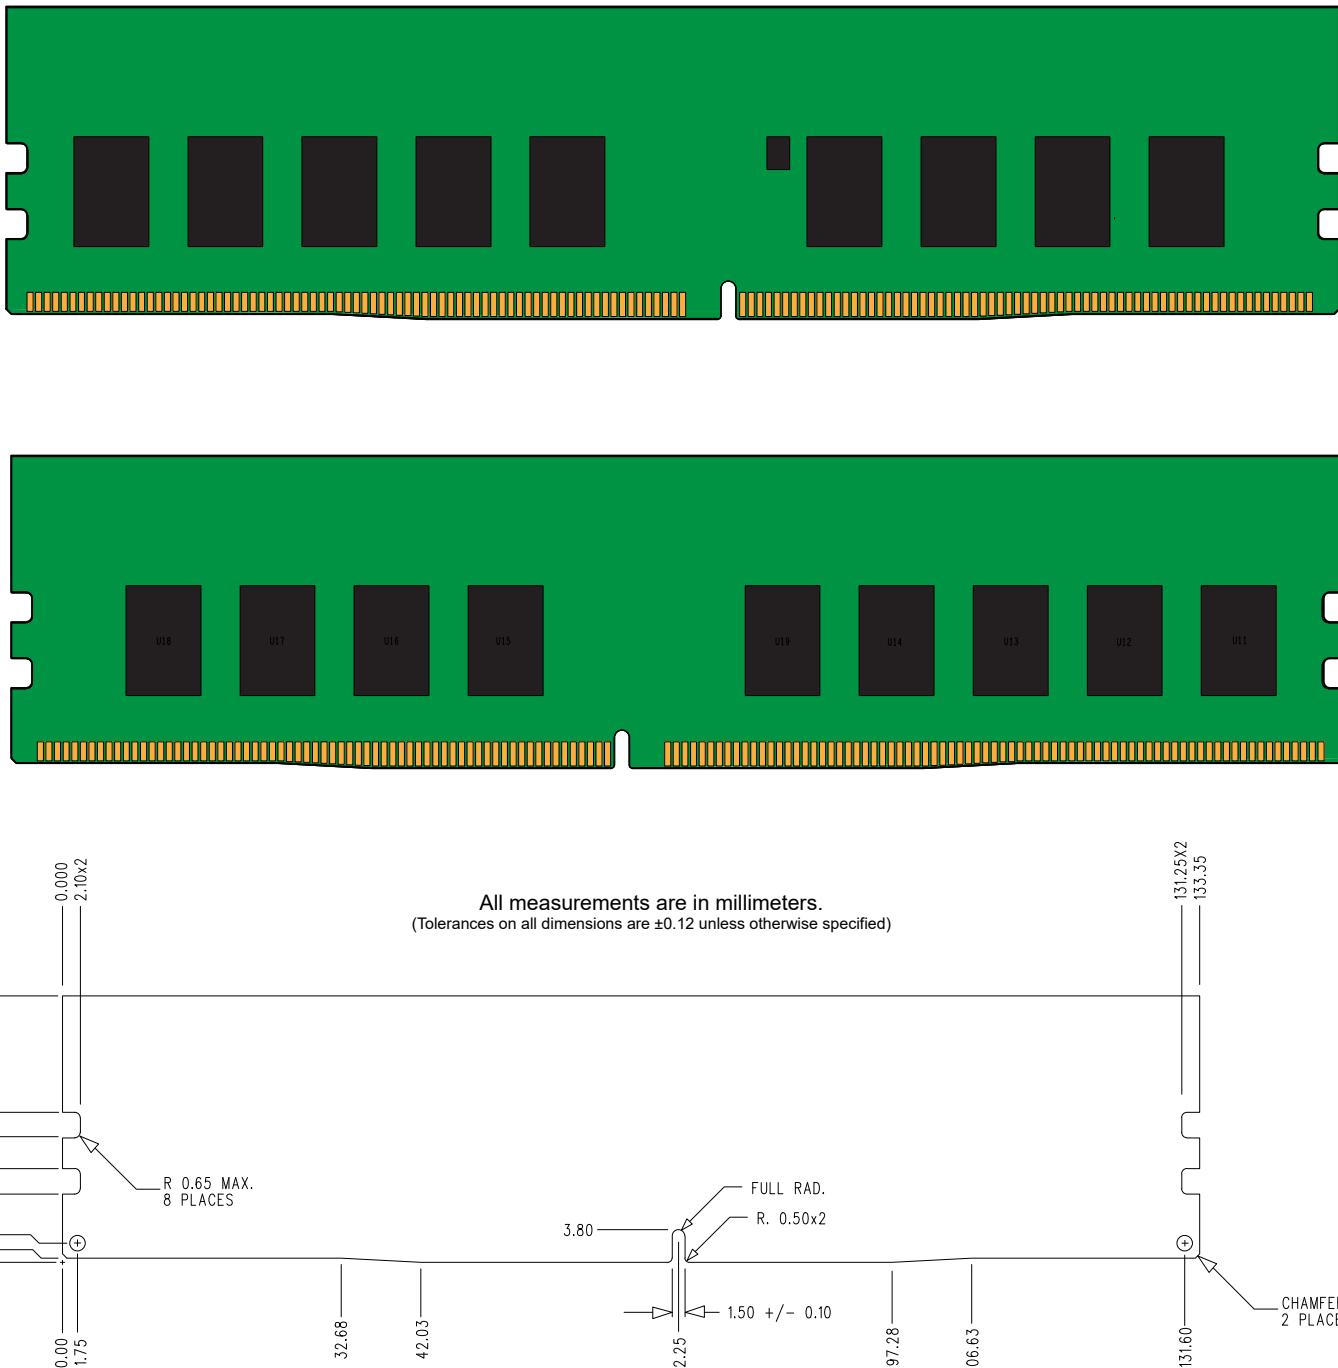

The product images shown are for illustration purposes only and may not be an exact representation of the product.
Kingston reserves the right to change any information at anytime without notice.