



EAP | Datasheet

EAP770

US: BE11000 Ceiling Mount Wi-Fi 7 Access Point


EU: BE9300 Ceiling Mount Wi-Fi 7 Access Point



Highlights

- BE11000 Tri-Band Wi-Fi 7 for US and BE9300 Tri-Band Wi-Fi 7 for EU. Buffering will no longer be a problem.
- Clear 6 GHz Band: Brings cleaner and wider band resources to your Wi-Fi.
- 320 MHz Bandwidth: Up to 320 MHz bandwidth enables many more simultaneous transmissions at the fastest possible speeds.
- Low Latency and Interference: Multi-Link Operation, and Multi-RUs ensure high performance of your network.
- Advanced Functions: Supports centralized management, mesh, and seamless roaming.


Product Pictures

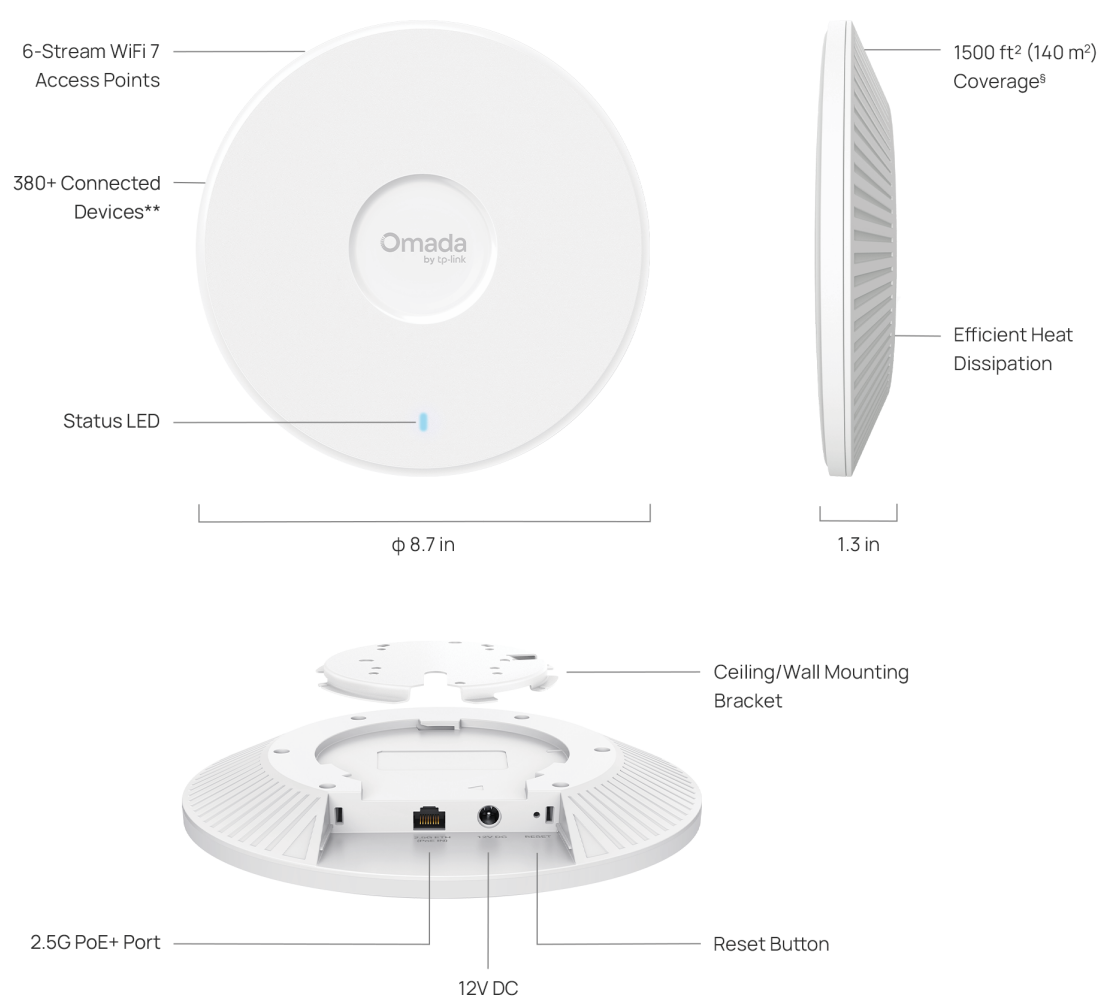

**The actual capacity depends on the wireless environment and client traffic and is generally less than the maximum number of client connections.
§Coverage value is calculated based on laboratory testing. Actual coverage is not guaranteed and will vary as a result of client limitations and environmental factors.

Omada Solution

Omada's Software Defined Networking (SDN) platform integrates network devices, including access points, switches, and gateways, providing 100% centralized cloud management. Omada creates a highly scalable network—all controlled from a single interface.

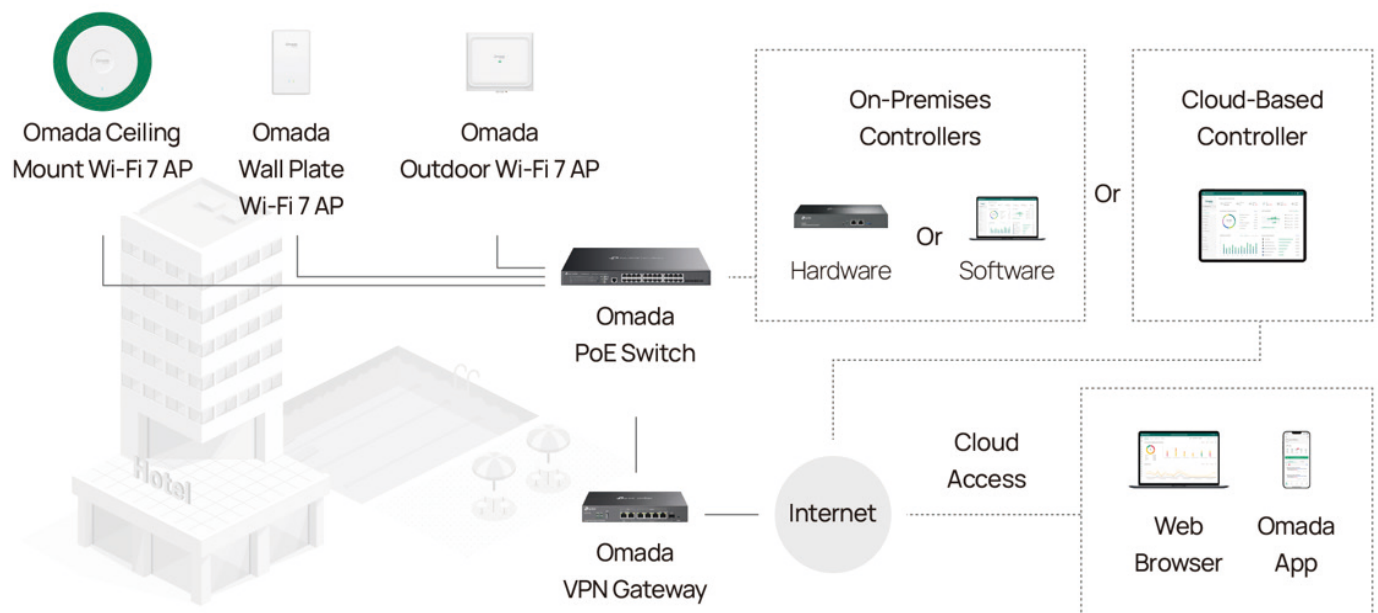

Specifications


| Model | | EAP770 |
|------------------------|------------------------------------|---|
| Name | | US: BE11000 Ceiling Mount Wi-Fi 7 Access Point EU: BE9300 Ceiling Mount Wi-Fi 7 Access Point |
| Main Design | LAN Interfaces | 1x 2.5Gbps Ethernet Port |
| | Wi-Fi Standards | IEEE 802.11 a/b/g/n/ac/ax/be |
| | Maximum Data Rate | US: 688 Mbps (2.4 GHz) + 4324 Mbps (5 GHz) + 5765 Mbps (6 GHz) EU: 688 Mbps (2.4 GHz) + 2882 Mbps (5 GHz) + 5765 Mbps (6 GHz) |
| | Wireless Client Capacity | 2 GHz: 128, 5 GHz: 128, 6 GHz: 128 |
| | Antennas | 2.4GHz: 2 x 4dBi; 5GHz: 2 x 5dBi; 6GHz: 2 x 5dBi |
| | Bluetooth | 1 × 4.0 dBi, Bluetooth 5.2 |
| | Transmit Power | CE: < 20 dBm (2.4 GHz, EIRP); < 23 dBm (5 GHz, band 1&band 2, EIRP); < 28 dBm (5 GHz, band 3, EIRP); <23dBm (6 GHz, EIRP) FCC:< 25 dBm (2.4 GHz); < 25 dBm (5 GHz); < 23 dBm (6 GHz) |
| | Reception Sensitivity | 2.4G: 11ax HE20 MCS0:-96dBm; 11ax HE20 MCS11:-66.5dBm 11ax HE40 MCS0:-93dBm; 11ax HE20 MCS11:-64dBm 5G: 11be EHT20MCS0:-94dBm; 11be EHT20MCS13:-63dBm; 11be EHT40MCS0:-90.5dBm; 11be EHT40MCS13:-60dBm; 11be EHT80MCS0:-88dBm; 11be EHT80MCS13:-57.5dBm; 11be EHT160MCS0:-85dBm; 11be EHT160MCS13:-55.5dBm 6G: 11be EHT20MCS0:-93dBm; 11be EHT20MCS13:-63dBm 11be EHT40MCS0:-90dBm; 11be EHT40MCS13:-60dBm 11be EHT80MCS0:-87.5dBm; 11be EHT80MCS13:-57.5dBm 11be EHT160MCS0:-84dBm; 11be EHT160MCS13:-55dBm 11be EHT320MCS0:-81.5dBm; 11be EHT320MCS13:-52.5dBm |
| Centralized Management | Omada Software Controller | • |
| | Omada Hardware Controller | • |
| | Omada APP | • |
| Security | Captive Portal Authentication | • |
| | Access Control | • |
| | Maximum number of MAC Filter | 4000 |
| | Wireless Isolation between Clients | • |
| | VLAN | • |
| | Rogue AP Detection | • |
| | Wireless Encryption | WPA-Personal/Enterprise, WPA2-Personal/Enterprise, WPA3-Personal/Enterprise, OWE |

| | | |
|--------------------|-------------------------------|---|
| Wireless Function | Multiple SSIDs | 24 (8 on each band) |
| | Channel | EU: 2G: 1~13; 5G: 36~140; 6G: 33~93 US: 2G:1~11; 5G: 36~165; 6G: 33~233 |
| | Enable/Disable Wireless Radio | • |
| | Enable/Disable SSID Broadcast | • |
| | Guest Network | • |
| | Automatic Channel Assignment | • |
| | Transmit Power Control | Adjust transmit Power on dBm |
| | QoS (WMM) | • |
| | Seamless Roaming | • |
| | Mesh | • |
| | Beamforming | • |
| | MU-MIMO | 2*2 DL/UL MU-MIMO |
| | OFDMA | DL/UL OFDMA |
| | Rate Limit | Based on SSID/Client |
| | Load Balance | • |
| | Airtime Fairness | • |
| | Band Steering | • |
| | RADIUS Accounting | • |
| | MAC Authentication | • |
| | Reboot Schedule | • |
| | Wireless Schedule | • |
| | Wireless Statistics | • |
| | Static IP/Dynamic IP | • |
| Support Data Rates | 802.11be | 2G Band: 8Mbps to 688Mbps(MCS0-MCS13,NSS=1 to 2 BE20/40) 5G Band: EU: 8Mbps to 2882Mbps(MCS0—MCS13,NSS=1 to 2 BE20/40/80/160) US: 8Mbps to 4324Mbps(MCS0—MCS13,NSS=1 to 2 BE20/40/80/160/240) 6G Band: 8Mbps to 5765Mbps(MCS0—MCS13,NSS=1 to 2 BE20/40/80/160/320) |
| | 802.11ax | 2G Band: 8Mbps to 574Mbps(MCS0—MCS11,NSS=1 to 2 HE20/40) 5G Band: 8Mbps to 2402Mbps(MCS0—MCS11, NSS=1 to 2 HE20/40/80/160) 6G Band: 8Mbps to 2402Mbps(MCS0—MCS11, NSS=1 to 2 HE20/40/80/160) |
| | 802.11ac | 6.5Mbps to 2166.7Mbps(MCS0—MCS11,NSS=1 to 2 VHT20/40/80/160) |
| | 802.11n | 6.5Mbps to 300Mbps(MCS0—MCS15,HT20/40) |
| | 802.11g | 6, 9, 12, 18, 24, 36, 48 ,54 Mbps |
| | 802.11b | 1, 2, 5.5, 11 Mbps |
| | 802.11a | 6, 9, 12, 18, 24, 36, 48 ,54 Mbps |


| | | |
|------------------------|------------------------------------|--|
| Management | LED ON/OFF Control | • |
| | Management MAC Access Control | • |
| | Web-based Management | • |
| | SNMP | v1, v2c, v3 |
| | SSH | • |
| | Restore & Backup | • |
| | Firmware update via Web | • |
| | NTP | • |
| | System Log | • |
| | Email Alerts | • |
| | | |
| Physical & Environment | Power Supply | 802.3at PoE or 12V/2.5A DC |
| | Maximum Power Consumption | EU: 24.05 W (For PoE); 20.92 W (For DC); US: 25.4 W (For PoE); 21.8 W (For DC); |
| | Reset | • |
| | Mounting | Ceiling / Wall / Junction box mouting (Kits included) |
| Others | Certifications | CE, FCC, RoHS, IC |
| | Dimensions (W x D x H) | 8.7 x 8.7 x 1.3 in (220 x 220 x 32.5 mm) |
| | Net Weight | 730g |
| | Enclosure Material / Rack Material | Top cover: PC Bottom shell: aluminum alloy Mounting rack: stainless steel |
| | Lightning Protection | 4KV |
| | Environment | Operating Temperature: 0 °C–40 °C (32 °F–104 °F); Storage Temperature: -40 °C–70 °C (-40 °F–158 °F); Operating Humidity: 10%–90% non-condensing; Storage Humidity: 5%–90% non-condensing; |

Antenna Radiation Patterns


2.4 GHz

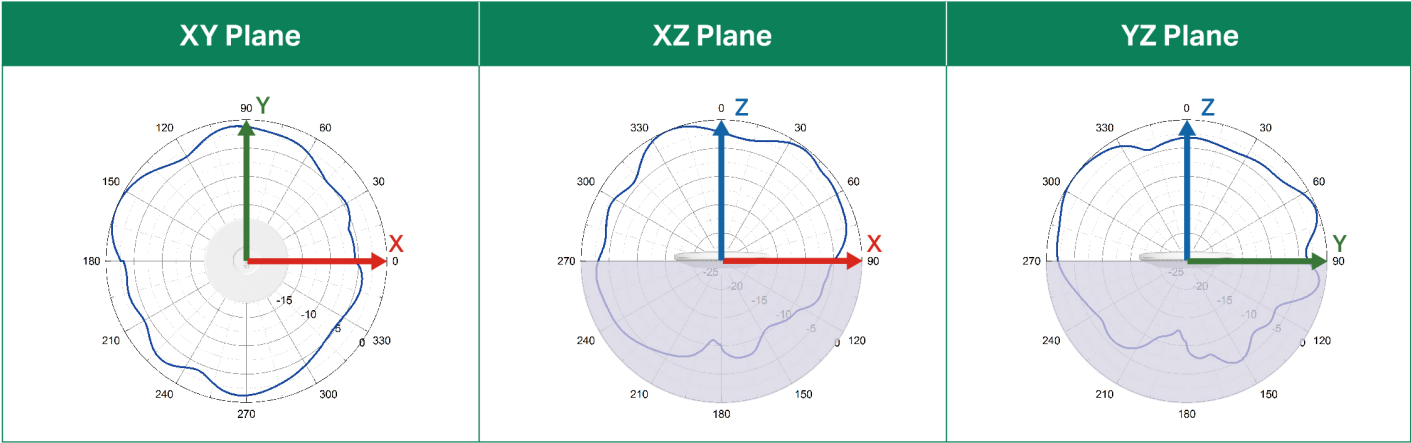

5 GHz

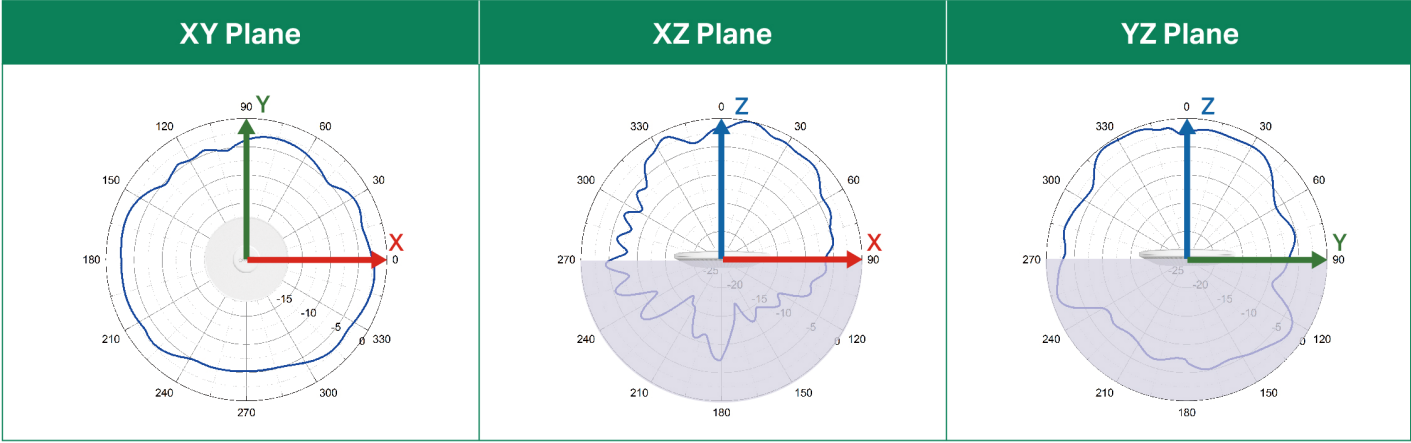

6 GHz

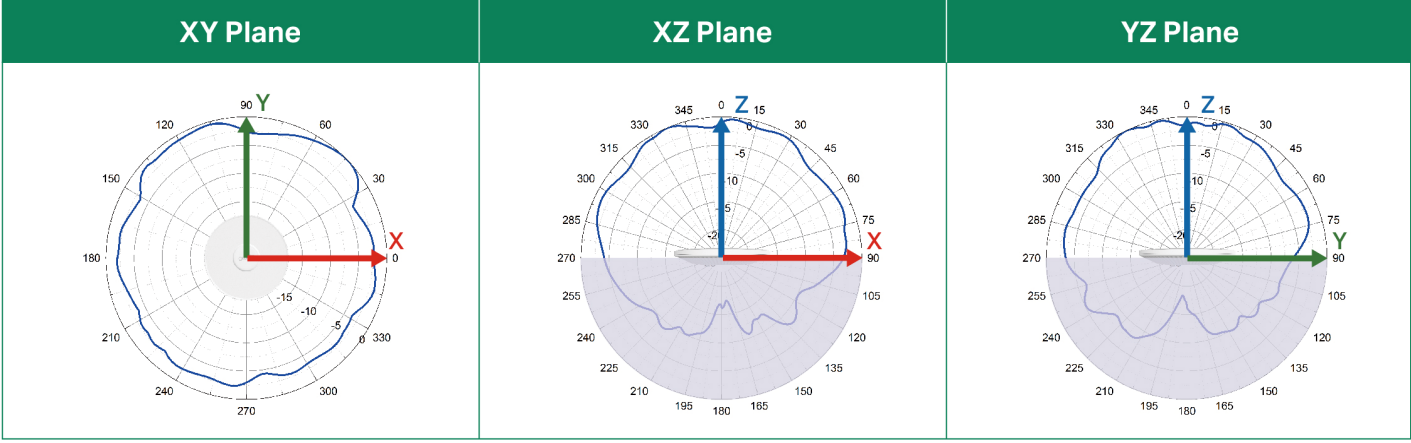

Disclaimers

- * Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. The 320 MHz bandwidth is only available on the 6 GHz band. Simultaneously, the 320 MHz bandwidth on the 6 GHz band and 160 MHz bandwidth on the 5 GHz band may be unavailable in some regions/countries due to regulatory restrictions. Double channel width and speed refer to 320 MHz compared to 160 MHz for WiFi 6 routers. Actual wireless data throughput, wireless coverage, and connected devices are not guaranteed and will vary as a result of internet service provider factors, network conditions, client limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and client location.
- * Use of Wi-Fi 7 (802.11be), Wi-Fi 6 (802.11ax), and features including Multi-Link Operation (MLO), 320 MHz Bandwidth, 6 GHz, 4K-QAM, Multi-RUs, OFDMA, MU-MIMO and BSS Color requires clients to also support the corresponding features.
- * Zero-Touch Provisioning and Auto Channel Selection and Power Adjustment require the use of Omada Cloud-Based Controller. Go to <https://www.omadanetworks.com/en/omada-cloud-based-controller/product-list/> to confirm which models are compatible with Omada Cloud-Based Controller.
- * The actual capacity depends on the wireless environment and client traffic and is generally less than the maximum number of client connections.
- * Coverage value is calculated based on laboratory testing. Actual coverage is not guaranteed and will vary as a result of client limitations and environmental factors.
- * Omada Mesh, AI Roaming, Captive Portal, and Cloud Access require the use of an Omada SDN controller. Please refer to the User Guides of Omada SDN controllers for configuration methods.