

PRODUCT DIMENSIONS AND SPECIFICATIONS

SPECIFICATIONS Projection system (3LCD)	Epson EB-84 - Epson EB-85 0.63" (x3) Polysilicon TFT active matrix XGA (1024 x 768) 4:3 VGA ~ UXGA 2600 lm / 2080 lm (Normal / Eco) 2600 lm / 2080 lm (Normal / Eco)	Epson EB-825 0.63" (x3) Polysilicon TFT active matrix XGA (1024 x 768) 4:3 VGA ~ UXGA 3000 lm / 2400 lm (Normal / Eco) 3000 lm / 2400 lm (Normal / Eco)	Epson EB-826W 0.59" with MLA (x3) Polysilicon TFT active matrix WXGA (1280 x 800) 16:10 VGA ~ UXGA 2500 lm / 2000 lm (Normal / Eco) 2500 lm / 2000 lm (Normal / Eco)
PROJECTION LENS Throw ratio Focal Length / F Number Focus / Zoom type Offset	1.38 - 2.24 : 1 18.2 mm - 29.2 mm / 1.49 - 1.94 Manual focus / 1.6 x Optical Zoom 8.6:1	1.38 - 2.24 : 1 18.2 mm - 29.2 mm / 1.49 - 1.94 Manual focus / 1.6 x Optical Zoom 8.6:1	1.38 - 2.24 : 1 18.2 mm - 29.2 mm / 1.49 - 1.94 Manual focus / 1.6 x Optical Zoom 10:01
LENS PROTECTION	A/V mute slide		
LAMP Type Life (Eco / Normal mode)	E-TORL 200W UHE 6000 hours / 5000 hours		
IMAGE Colour Reproduction Fan noise (Eco / Normal mode) Contrast ratio ** Screen size (Projection distance) Keystone correction	Full-Colour (16.77 million colours) 28 dB / 35 dB 2000:1 30" to 300" (0.83 m - 8.54 m) Vertical (automatic); ± 30 degrees		
INPUT Computer Video Audio USB Control Network	2 x D-sub 15-pin (RGB) 1 x D-sub 15-pin (component), 1 x RCA, 1 x S-Video 2 x Stereo mini-jack in, 1 x Stereo mini-jack Microphone, 1 x Stereo RCA 1 x USB 2.0 type A *, 1 x USB 2.0 type B 1 x RS232C (D-Sub 9pin) LAN via RJ45		
OUTPUT	1 x D-sub 15-pin, 1 x Stereo mini-jack out		
BUILT-IN SPEAKER	10 W monaural		
DIRECT POWER ON / OFF	Yes		
SECURITY	Improved security bar, kensington lock hole, password protection, control panel lock		
OTHER FUNCTIONS	Auto source search, quick start (8 sec.), 9 colour modes, microphone input, monitoring over network, SNMP, user logo, freeze, E-Zoom, help, test pattern, user button on remote control, improved dust resistant design		
OPERATING TEMPERATURE / ALTITUDE	5°C to 35°C / 0 to 2,286 m (High Altitude Mode over 1500 m)		
POWER REQUIREMENTS Power supply wattage Power consumption lamp on Power consumption stand-by	100 - 240 V AC ±10%, 50/60 Hz 228W (Eco) / 275W 3W (communication off) / 8.9W (communication on)		
WEIGHT AND DIMENSIONS Weight Dimensions (D x W x H)	3.1 kg 250 x 327 x 95 mm (excluding feet)		
ON-SCREEN MENU	34 languages: English / French / German / Italian / Spanish / Catalan / Portuguese / Dutch / Danish / Polish / Hungarian / Czech / Romanian / Slovenian / Norwegian / Swedish / Finnish / Russian / Ukrainian / Greek / Turkish / Arabic / Croatian / Slovak / Bulgarian / Malay / Vietnamese / Hebrew / Japanese / simplified Chinese / traditional Chinese / Korean / Thai / Indonesian		
SUPPLIED ACCESSORIES Power Cable Computer Cable USB Cable Soft carry case Remote Control Epson Projector Software (CD-ROM) Password Protect Sticker User Manual	3 m 1.8 m D-sub 15pin (Male / Male) 1.8 m USB-A to USB-B included included with 2 x AA type batteries included included included		
OPTIONAL ACCESSORIES Wireless LAN unit (a/b/g) Quick Wifi Connection USB key Visualiser Lamp Filter Ceiling Mount	ELPAP03 * ELPAP04 * ELPDC05 * ELPLP50 ELPAF22 ELPMB23		
WARRANTY	3 years main unit - 1 year on lamp		

* Excludes EB-84 ** ISO 21118 based measurement



Better Products
for a Better Future™

For further information please contact your local Epson office or visit www.epson-europe.com


Austria 0810/20 01 13 (0,07 €/Min.) **Belgium** 070/350120 (0.1735 €/min.) **Czech** 800/142 052 **Denmark** 44 50 85 85
Finland 0201 552 091 **France** 09 74 75 04 04 (0,12 €/min) **Germany** 01805/23 41 10 (0,14 €/Min.) **Greece** 210-8099499
Hungary 06800 147 83 **Ireland** 01 436 7742 **Italy** 02-660321 10 (0,12 €/min.) **Luxemburg** 900/43010 (0,24 €/min.)
Middle East +9714 8818934 **Netherlands** 0900-5050808 (0.05 €/oproep + 0.15 €/min.) **Norway** 22 06 42 80
Poland 0-0-800 4911299 (0,16 zł/min.) **Portugal** 707 222 111 **Russia** (095) 777-03-55 **Slovakia** 0850 111 429
South Africa (+2711) 465 9621 **Spain** 93 582 15 00 **Sweden** 0771-400135 (Mobilsamtal – 0,99 kr/min, Lokala samtal – 0,30 kr/min, Utlandssamtal – 0,89 kr/min) **Switzerland** 0848 448820 (4-8 cent./min.) **Turkey** (0212) 3360303
United Kingdom 0871 222 6702

Trademarks and registered trademarks are the property of Seiko Epson® Corporation or their respective owners.
Product information is subject to change without prior notice.

EPSON EB-8 SERIES



Front view

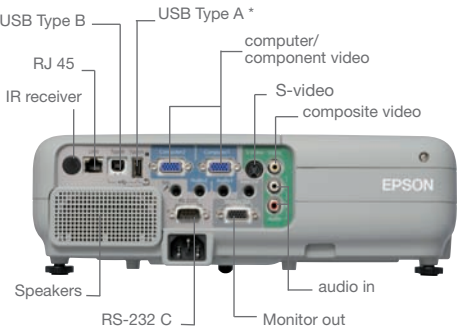

Rear view

Screen size in inch	4:3 aspect ratio			
	Wide		Tele	
30	cm 83	inch 33	cm 136	inch 54
40	cm 111	inch 44	cm 182	inch 72
50	cm 140	inch 55	cm 229	inch 90
60	cm 169	inch 66	cm 275	inch 108
80	cm 226	inch 89	cm 368	inch 145
100	cm 283	inch 111	cm 460	inch 181
150	cm 426	inch 168	cm 692	inch 272
200	cm 568	inch 224	cm 923	inch 363
250	cm 711	inch 280	cm 1155	inch 455
280	cm 854	inch 336	cm 1386	inch 546

Screen size in inch	16:10 aspect ratio			
	Wide		Tele	
30	cm 88	inch 35	cm 144	inch 57
40	cm 118	inch 47	cm 193	inch 76
50	cm 149	inch 58	cm 243	inch 95
60	cm 179	inch 70	cm 292	inch 115
80	cm 239	inch 94	cm 390	inch 153
100	cm 300	inch 118	cm 488	inch 192
150	cm 451	inch 178	cm 733	inch 289
200	cm 603	inch 237	cm 979	inch 385
250	cm 754	inch 297	cm 1224	inch 482
280	cm 845	inch 333	cm 1371	inch 540



EPSON EB-8 SERIES

PRESENT SMARTLY



EPSON EB-8 SERIES

These four lightweight projectors have everything you need to give a successful presentation. Providing great images and innovative features, they are easy to use and highly energy-efficient.

Wide connectivity and new features

The Epson EB-8 Series (84, 85, 825, 826W) provides many features to improve the quality of your projection experience. These include microphone input and powerful integrated speakers for easier speaking in a large room; USB Direct connection, which allows you to plug in the new Epson Visualiser and project a source document or 3D objects directly, as well as normal projection from a PC onto a larger screen. And so that you can focus on your audience and your presentation, all of these features are accessible from the new remote control.

Exploit your network

You can remotely configure and operate the projector over your network with ease, thanks to Epson EMP Monitor™ software. For example, you can set an e-mail alert for the internal temperature of your projector or to monitor lamp status, and have advanced notice of any problems that could disrupt your presentation.

Thanks to their wide connectivity, mobility and easy, convenient features the EB-8 Series are perfect for use in educational environments.

Our contribution to the environment

The Epson EB-8 Series is designed and produced in compliance with our environmental policy. Energy efficiency is achieved with of a long lamp-life. Add in easy maintenance and the result is a low total cost of ownership, which makes these projectors particularly attractive.

Environmentally friendly and cost-effective

- Minimises power consumption when not in use (timer functions, rapid power on/off)
- Reduces pollution: no paint used in manufacture, 100% recyclable packaging
- Provides clear visibility in light rooms and saves money thanks to the E-TORL Lamp - up to 6,000 hours lifetime in Eco mode

We are committed to providing the highest performance in our projectors by integrating innovative technologies.



Source: Futuresource Consulting Ltd.



3LCD technology provides superb image quality with smooth and natural colour reproduction.

Colour Light Output, the new metric for projector brightness

Epson provides Colour Light Output specification data. Colour Light Output measures a projector's ability to deliver colour. Colour Light Output provides users with a simple, accurate and easy to understand way to evaluate projector colour performance.

COMPACT, YET FULL OF SMART, CONVENIENT FEATURES

Jpeg viewer: go light, leave your PC behind. Simply plug in your USB key and start your presentations

Quick start, quick cool down: warms up in 8 seconds, cools down instantly

Quick and easy wireless connection*: plug the optional wireless module into your projector, and display your PC desktop within seconds
* Excludes EB-84

Great sound: amplify your voice in large or noisy rooms by using a microphone and the powerful 10W integrated speakers


A/V mute slide: instantly cuts both projector and sound, enabling the audience to focus entirely on your presentation

Totally secure: it can be ceiling-mounted and secured by a reinforced bar and Kensington lock

Simple and flexible installation: get perfect image on screen with the automatic keystone (± 30% vertically) and the new x1.6 optical zoom




CUTTING-EDGE CONNECTIONS: USB CABLE

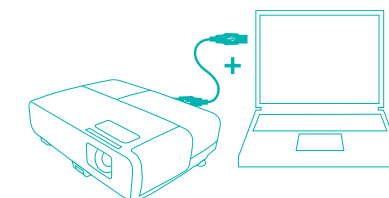

The easiest way to project from a PC: 2-in-1 USB display

A single USB cable, connecting the projector to your PC, combines the functions of display and Page Up/Down, halving the number of cables you need.

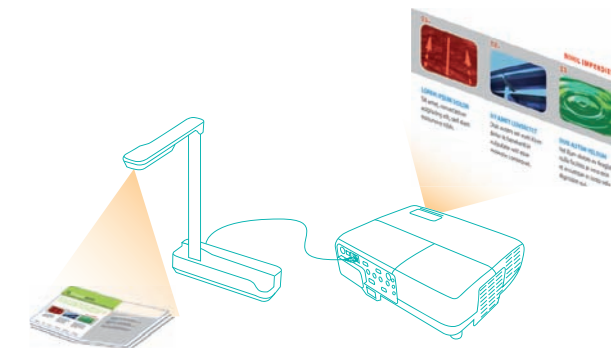

Connection to the Epson Visualiser

Project documents and objects directly just by plugging in the new Epson Visualiser via a USB cable.

CHOOSE THE RIGHT PROJECTOR FOR YOU

EPSON EB-84



EPSON EB-85



EPSON EB-825



EPSON EB-826W

