

Memory Module Specifications

KSM29ED8/16HD

16GB 2Rx8 2G x 72-Bit PC4-2933

CL21 288-Pin DIMM

DESCRIPTION

Kingston's KSM29ED8/16HD is a 2G x 72-bit (16GB) DDR4-2933 CL21 SDRAM (Synchronous DRAM), 2Rx8, ECC, memory module, based on eighteen 1G x 8-bit FBGA components. The SPD is programmed to JEDEC standard latency DDR4-2933 timing of 21-21-21 at 1.2V. Each 288-pin DIMM uses gold contact fingers. The electrical and mechanical specifications are as follows:

FEATURES

- Power Supply: VDD = 1.2V Typical
- VDDQ = 1.2V Typical
- VPP = 2.5V Typical
- VDDSPD = 2.2V to 3.6V
- Nominal and dynamic on-die termination (ODT) for data, strobe, and mask signals
- Low-power auto self refresh (LPASR)
- Data bus inversion (DBI) for data bus
- On-die VREFDQ generation and calibration
- Dual-rank
- On-board I2 serial presence-detect (SPD) EEPROM
- Temperature sensor with integrated SPD
- 16 internal banks; 4 groups of 4 banks each
- Fixed burst chop (BC) of 4 and burst length (BL) of 8 via the mode register set (MRS)
- Selectable BC4 or BL8 on-the-fly (OTF)
- Fly-by topology
- Terminated control command and address bus
- PCB: Height 1.23" (31.25mm)
- RoHS Compliant and Halogen-Free

SPECIFICATIONS

| | |
|--|-------------------|
| CL(IDD) | 21 cycles |
| Row Cycle Time (tRCmin) | 45.75ns(min.) |
| Refresh to Active/Refresh Command Time (tRFCmin) | 350ns(min.) |
| Row Active Time (tRASmin) | 32ns(min.) |
| Maximum Operating Power | * |
| UL Rating | 94 V - 0 |
| Operating Temperature | 0° C to +85° C |
| Storage Temperature | -55° C to +100° C |

*See IDD Specifications (page 2)

Module Assembly

| |
|----------------------------|
| DRAM: HYNIX (D-DIE) |
|----------------------------|




Continued >>

IDD Specifications

| IDD | | unit |
|--------|------|------|
| Symbol | 2933 | |
| IDD0 | 540 | mA |
| IDD0A | 542 | mA |
| IDD1 | 608 | mA |
| IDD1A | 632 | mA |
| IDD2N | 480 | mA |
| IDD2NA | 483 | mA |
| IDD2NT | 569 | mA |
| IDD2NL | 331 | mA |
| IDD2NG | 479 | mA |
| IDD2ND | 460 | mA |
| IDD2NP | 489 | mA |
| IDD2P | 320 | mA |
| IDD2Q | 423 | mA |
| IDD3N | 518 | mA |
| IDD3NA | 518 | mA |
| IDD3P | 392 | mA |
| IDD4R | 1212 | mA |
| IDD4RA | 1238 | mA |
| IDD4RB | 1226 | mA |
| IDD4W | 1209 | mA |
| IDD4WA | 1237 | mA |
| IDD4WB | 1124 | mA |
| IDD4WC | 1170 | mA |
| IDD4WP | 1352 | mA |
| IDD5B | 1990 | mA |
| IDD5F2 | 1496 | mA |
| IDD5F4 | 1347 | mA |
| IDD6N | 338 | mA |
| IDD6E | 466 | mA |
| IDD6R | 218 | mA |
| IDD6A | 466 | mA |
| IDD7 | 1398 | mA |
| IDD8 | 176 | mA |

| IPP | | unit |
|--------|------|------|
| Symbol | 2933 | |
| IPP0 | 76 | mA |
| IPP1 | 84 | mA |
| IPP2N | 61 | mA |
| IPP2P | 56 | mA |
| IPP3N | 243 | mA |
| IPP3P | 241 | mA |
| IPP4R | 180 | mA |
| IPP4W | 180 | mA |
| IPP5B | 503 | mA |
| IPP5F2 | 339 | mA |
| IPP5F4 | 296 | mA |
| IPP6N | 93 | mA |
| IPP6E | 125 | mA |
| IPP6R | 74 | mA |
| IPP6A | 125 | mA |
| IPP7 | 175 | mA |
| IPP8 | 59 | mA |

MODULE DIMENSIONS

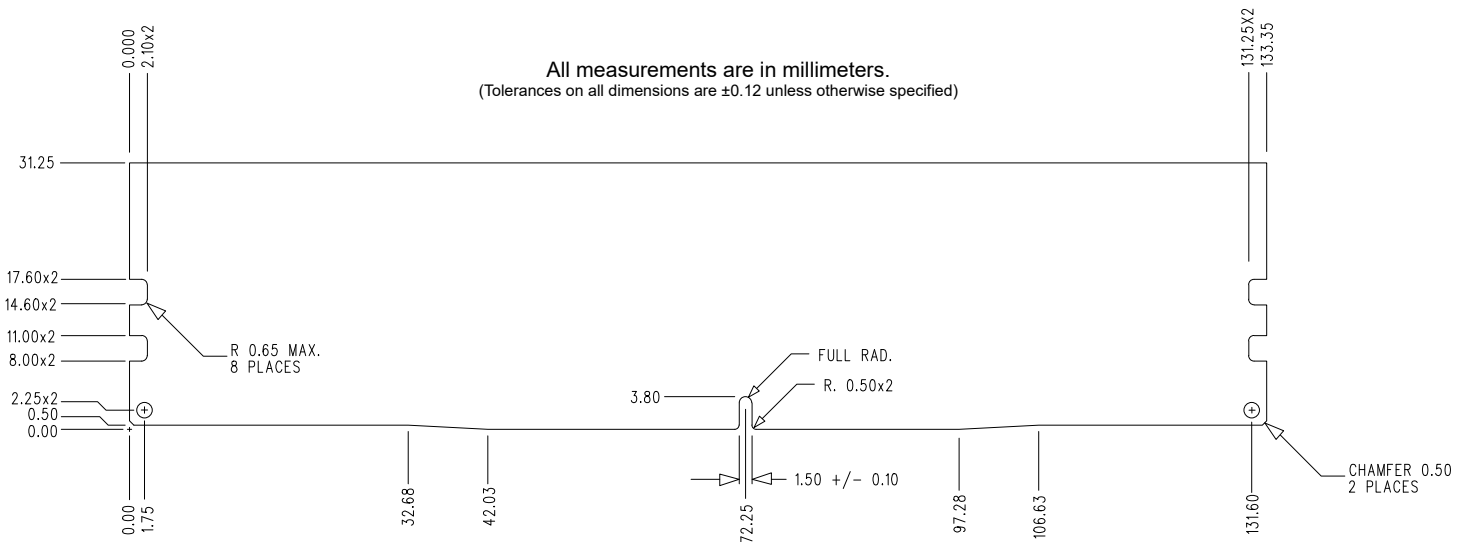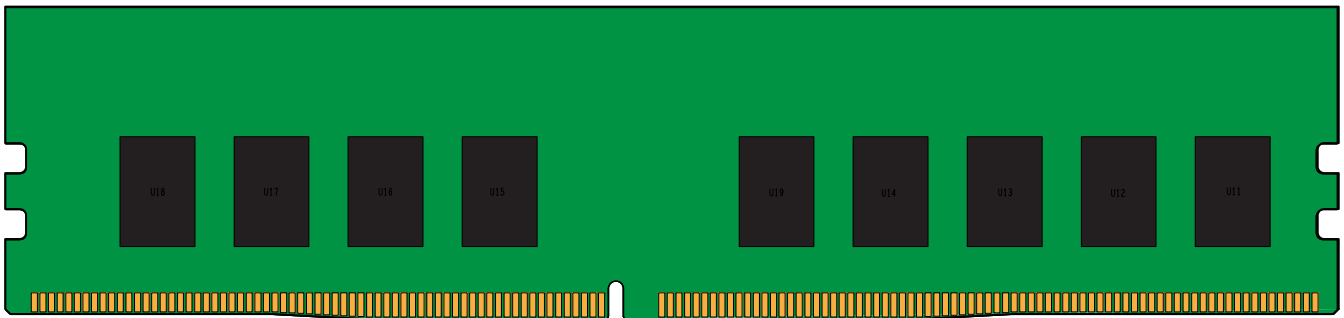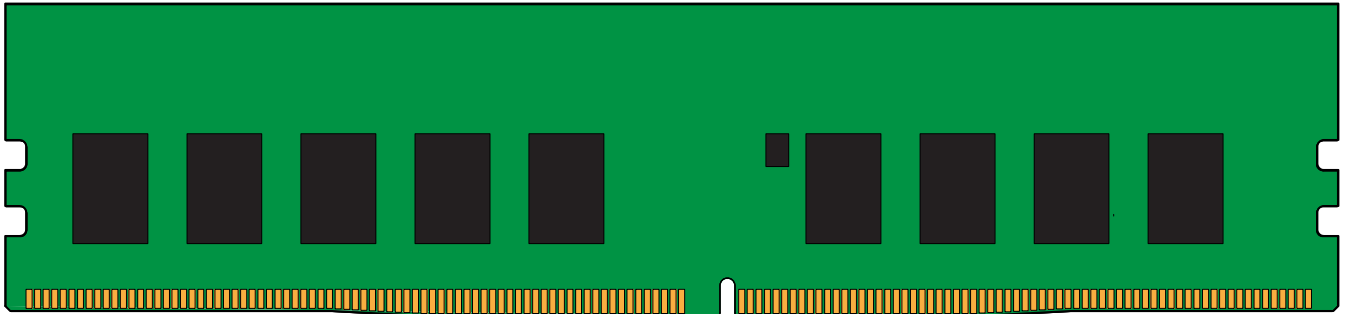

The product images shown are for illustration purposes only and may not be an exact representation of the product. Kingston reserves the right to change any information at anytime without notice.