

AX6000 Whole Home Mesh Wi-Fi System

Model: Halo H90X

Highlights

- 6000 Mbps Dual Band Wi-Fi
- Seamless Roaming with One Wi-Fi Name
- Connect over 150 Devices
- Easy App Control
- 2.5 Gbps Multi-Gig Port
- Expand Coverage with Halo H Models











Seamless Coverage up to

6000_{ft}

550_{m²}







Applications





Features

Fast Wi-Fi 6 for an Upgraded **Network Experience**

Armed with Wi-Fi 6, Halo H90X improves virtually every aspect of your network, especially when it comes to speed, efficiency, and capacity.



1024-QAM

Boosts raw speeds by 25% compared with 256-QAM.



Delivers greater network capacity and efficiency.



160 MHz Channels

Double channel width for faster connections.



MU-MIMO

Connect more devices simultaneously.



BSS Color

Marks frames from neighboring networks to increase efficiency.



// A Whole Home Wi-Fi Solution

Halo works as a unified system to guarantee a strong Wi-Fi signal in every corner of your home. Mercusys Mesh Technology provides an incredibly fast and stable user experience when you walk around your home. Interruption and buffering will be a thing of the past.



Whole Home Coverage

Eliminate weak signal areas with clearer, stronger whole home Wi-Fi.




Seamless Roaming

Choose the best signal and enjoy the best connections.



One Unified Network

Run a single home network with one Wi-Fi name and password.

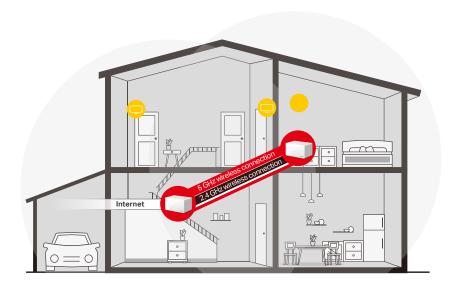



Connects over 150 Devices

Halo keeps your phones, computers, and all IoT devices connected simultaneously.



Quality of Service (QoS)

Prioritize select devices to perform better.



Parental Controls

Set access control and time limits to better manage your family's online habits.



Specifications

Hardware

Ports

1× 2.5 Gbps Port + 2× Gigabit Ports (WAN/LAN auto-sensing)

Button

Reset button

Dimensions (W x D x H)

 $5.9 \times 3.7 \times 3.4 \text{ in} (150 \times 94 \times 86.7 \text{ mm})$



Wireless

Wireless Standards

IEEE 802.11 a/n/ac/ax 5 GHz, IEEE 802.11 b/g/n/ax 2.4 GHz

Signal Rate

4804 Mbps on 5 GHz, 1148 Mbps on 2.4 GHz

Mesh protocol

802.11k/v/r

EIRP

2.4 GHz < 20dBm (EIRP)

5 GHz < 23dBm (EIRP)

Reception Sensitivity

2.4GHz:

11g 6Mbps:-96dBm

11g 54Mbps:-78dBm

11n HT20 MCS7:-76dBm

11n HT40 MCS7:-73dBm

5GHz:

11a 6Mbps:-95dBm

11a 54Mbps:-77dBm

11ac VHT20 MCS8:-72dBm

11ac VHT40 MCS9:-67dBm

11ac VHT80 MCS9:-63dBm

Software

Working Mode

Router, Access Point

WAN Type

Dynamic IP/Static IP/PPPoE/L2TP/PPTP

DHCP

Server, Client

Protocols

Supports IPv4 and IPv6

Guest Network

2.4 GHz Guest Network x 1.

5 GHz Guest Network x 1

Features

Parental Controls, QoS (Quality of Service),

Monthly Report, Assisted Setup, Address

Reservation, Port Forwarding, Mercusys DDNS,

VLAN, IPv6, LED Control

Management

Local Management, Remote Management,

Multi-Managers

Wireless Security

WPA-PSK/WPA2-PSK/WPA3



Specifications

\sim	- 1			
1	т	h	\sim	re
	ш	ı	ᆫ	1.5

Package Contents for Halo H90X:

3

(2-Pack)

2× Halo H90X Units

1× RJ45 Ethernet Cable

2× Power Adapters

Quick Installation Guide

Environment

Operating Temperature: 0°C~40°C (32°F~104°F)
Operating Humidity: 10%~90% Non-Condensing
Storage Humidity: 5%~90% Non-Condensing

[†]Seamless roaming requires clients to support 802.11k/v/r and may require additional setup. Performance may vary depending on the client device.

^{*}Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput, wireless coverage, and quantity of connected devices are not guaranteed and will vary as a result of network conditions, client limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and client location.

[&]quot;Use of Wi-Fi 6 and other features including OFDMA, MU-MIMO, 1024-QAM, HE160, BSS Color, TWT require clients to also support the corresponding features. The 160 MHz bandwidth may be unavailable in the 5 GHz band in some regions/countries due to regulatory restrictions. This product may not support all the mandatory features of IEEE 802.11AX specifications. Further software upgrades for feature availability may be required.

[§]Use of WAP3 requires clients to also support WPA3.

^{*}Please note that the Halo H series and S series cannot work together. Halo H90X is compatible with other units from the Halo H series to form a Mesh network.

^{**}All WAN/LAN ports will operate as either WAN or LAN ports. 2.5 Gbps internet speeds require compatible service plans and equipment. 2.5 Gbps and Gigabit ports cannot be concurrently configured as WAN ports. © 2022 MERCUSYS