

Keen 600

The power to control

PN: UPLI-LI060KE-CG01B
EAN: 66422956009496

Specifications

Capacity	600 VA / 360 W
Type	Line-Interactive
Input	
Nominal Voltage	230 VAC
Accepted Voltage Range	162 ~ 290 VAC
Frequency Range	50Hz / 60Hz (Auto Sensing)
Output	
Nominal Voltage	230 VAC
Accepted Voltage Range	207~253 VAC
Frequency Range (Batt. Mode)	50 Hz / 60Hz ± 1%
Power Factor	0.6 @ nominal voltage (100% load)
Waveform (Batt. Mode)	Simulated Sinewave
Transfer Time	Typical 4 ms
Overload Protection	Circuit breaker
Line mode overload	>(110±10)% fault after alarm 1min >(120±10)% fault immediately
Battery mode overload	>(110±10)% fault after alarm 1min >(120±10)% fault immediately
Indicators type	
LED & Alarm	Load Capacity, Load & Battery level, AC mode, Battery mode, Fault indicators
Protection	
Outlets type	2 x Schuko Battery Backup
Full protection	Overload, Short Circuit, Over discharge and Over charge
Environment	
Noise level	Less than 40dB
Humidity	0-90 % (non-condensing)
Temperature	0-40°C



2 x Schuko outlets with protection



Auto-Restart



Simulated sinewave

- Simulated sinewave
- Auto-Restart while AC is recovering
- Auto-Charge
- Automatic Voltage Regulation (AVR)
- Off-Mode Charging
- Cold start function

Battery


Battery Type & Number	1 x GP07122L (PN: BTVACFUBBTO2LCG01B)
Typical Recharge Time	6 hours up to 90% capacity
Running time on battery (minutes)	25% Load - 19 min 50% Load - 5 min 75% Load - 1 min 100% Load - <1 min

Physical

Product dimensions	276 x 87 x 165 mm
Product weight	4 kg
Retail pack dimensions	322 x 129 x 237 mm
Retail pack Weight	4.2 kg
Power cord	1.2 m length



Running time on battery

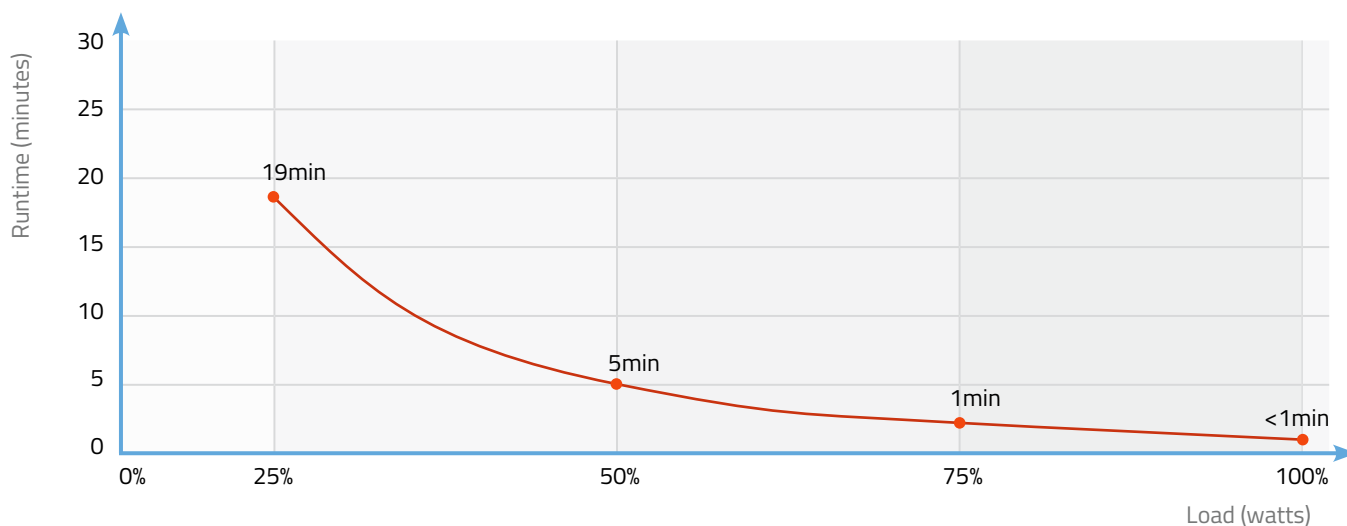

Logistics

Carton Box Size (LxWxH)	524 x 245 x 330 mm
Pieces in the Carton Box	4
Net & Gross weight / CTN	NW: 16.8 kg / GW: 17.5 kg



Certificates

RoHS **CE**
2011/65/EU

